




Allure-PD500

18W Decorative Glass Pendant Mounted Luminaire

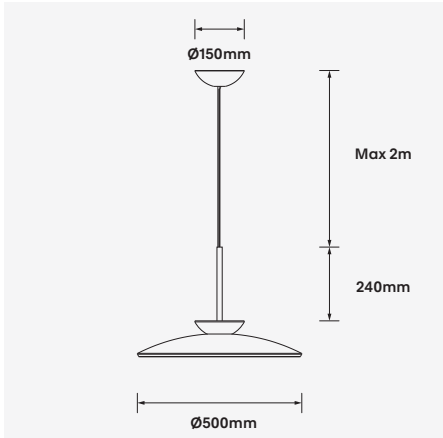

Glass Finishes

- Smoke Grey (SG) Amber (AM)

Centre and Base Finishes

- Brushed Nickel (BN) Brushed Brass (BB)

WATTAGE 18W IP 20 3-Step CRI (Ra) >90 MAINS DIM CE WARRANTY 5YR

Flicker Free Ceiling mount

The Allure pendant luminaire seamlessly carries forward the sophistication of the Allure pendant series, combining exquisite Czechia glass with textured brushed aluminum to create a design masterpiece.

Featuring a brushed metal façade that houses an integrated LED light source, it adds a touch of elegance to both residential and commercial spaces, making bedrooms and hallways truly shine with its captivating beauty. Its unique character and exceptional luminosity are designed to enchant and leave a lasting impression.

The Allure delivers soft, diffused lighting that enhances any room. Its innovative backlighting technology minimizes glare, ensuring comfort and ambience. Blending durability with timeless design, making it the ideal choice for architectural and decorative lighting solutions.

- Luminaire wattage: 18W
- Luminous flux: 1350Lm - 1419Lm²
- Luminaire efficacy: 64.3Lm/W - 67.57Lm/W¹
- Correlated colour temperature: 2700K, 3000K (standard)
- Colour rendering index: >90³
- Mac-Adams Ellipse: 3-SDCM
- LED type: Epistar SMD LED
- Symmetrical distribution: 360°
- Outer trim Ø500mm x Depth 90mm
- Ingress protection rating: IP20
- Glass finish: Smoke Grey, Amber
- Metal ware finish: Brushed Brass, Brushed Nickel,
- Longevity: >50,000Hrs L80 B20
- Input voltage: 220-240VAC, 50-60Hz
- Driver: Mains-Dimmable (Standard); DALI optional
- Weight: 7.65Kg
- Box dimensions & weight: 63 x 63 x 21cm. 9.8Kg.
- Warranty: 5 years⁴

Model	Luminous Flux ²	LED Wattage	System Wattage	CCT	CRI ³	Distribution
ALLURE-PD500-18W-27K	1350Lm	18W	21W	2700K	>90	360°
ALLURE-PD500-18W-3K	1419Lm	18W	21W	3000K	>90	360°

For Mains-Dimming add suffix MD (standard)
For DALI-Dimming add suffix D

Example product order code configuration: ALLURE-PD500-18W-3K-360-MD-(AM/BB)

Model	Wattage		CCT		Distribution		Driver	Glass Finish / Center and Base Finish		
ALLURE-PD500	+	18W	+	3K	+	360	+	MD	+	AM/BB

1 Luminaire efficacy based on 3000K and smoked Grey glass; CCT variation will alter efficacy
2 +/- 10% stated initial LED luminous flux tolerance
3 Colour Rendering Index: >90 Standard
4 Five year manufacturer's warranty covering product defects and performance deficiencies