




Allure-WL320

11W Decorative Glass Wall /  
Ceiling Mounted Luminaire

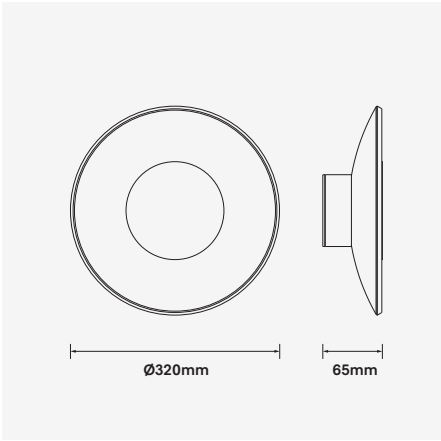

Glass Finishes

-  Smoke Grey (SG)
-  Amber (AM)

Centre and Base Finishes

-  Brushed Nickel (BN)
-  Brushed Brass (BB)

WATTAGE 11W

IP 20

3-Step

CRI (Ra) >90

MAINS DIM

CE

WARRANTY 5YR

Flicker Free

Wall mount

Ceiling mount

The Allure wall luminaire seamlessly carries forward the sophistication of the Allure pendant series, combining exquisite Czechia glass with textured brushed aluminum to create a design masterpiece.

Featuring a brushed metal façade that houses an integrated LED light source, it adds a touch of elegance to both residential and commercial spaces, making bedrooms and hallways truly shine with its captivating beauty. Its unique character and exceptional luminosity are designed to enchant and leave a lasting impression.

The Allure delivers soft, diffused lighting that enhances any room. Its innovative backlighting technology minimizes glare, ensuring comfort and ambience. Blending durability with timeless design, making it the ideal choice for architectural and decorative lighting solutions.

- Luminaire wattage: 11W
- Luminous flux: 218Lm - 220Lm<sup>2</sup>
- Luminaire efficacy: 16.77Lm/W - 16.95Lm/W<sup>1</sup>
- Correlated colour temperature: 2700K, 3000K (standard)
- Colour rendering index: >90<sup>3</sup>
- Mac-Adams Ellipse: 3-SDCM
- LED type: Epistar SMD LED
- Symmetrical distribution: 360°
- Outer trim Ø320mm x Depth 68mm
- Ingress protection rating: IP20
- Glass finish: Smoke Grey, Amber
- Metal ware finish: Brushed Brass, Brushed Nickel,
- Longevity: >50,000Hrs L80 B20
- Input voltage: 220-240VAC, 50-60Hz
- Driver: Mains-Dimmable (Standard); DALI optional
- Weight: 2.3Kg
- Box dimensions & weight: 40 x 40 x 14cm. 3.2Kg.
- Warranty: 5 years<sup>4</sup>

| Model                | Luminous Flux <sup>2</sup> | LED Wattage | System Wattage | CCT   | CRI <sup>3</sup> | Distribution |
|----------------------|----------------------------|-------------|----------------|-------|------------------|--------------|
| ALLURE-WL320-11W-27K | 218Lm                      | 11W         | 13W            | 2700K | >90              | 360°         |
| ALLURE-WL320-11W-3K  | 220Lm                      | 11W         | 13W            | 3000K | >90              | 360°         |

For Mains-Dimming add suffix MD (standard)  
For DALI-Dimming add suffix D

Example product order code configuration: ALLURE-WL320-13W-3K-360-MD-(AM/BB)

| Model        | Wattage |     | CCT | Distribution |   | Driver | Glass Finish / Center and Base Finish |    |   |       |
|--------------|---------|-----|-----|--------------|---|--------|---------------------------------------|----|---|-------|
| ALLURE-WL320 | +       | 11W | +   | 3K           | + | 360    | +                                     | MD | + | AM/BB |

1 Luminaire efficacy based on 3000K and smoked Grey glass; CCT variation will alter efficacy  
2 +/- 10% stated initial LED luminous flux tolerance  
3 Colour Rendering Index: >90 Standard  
4 Five year manufacturer's warranty covering product defects and performance deficiencies