


## DUSK-BL65

### 5W Adjustable CCT Garden Landscape Luminaire



Luminaire Finish

Black (BK)

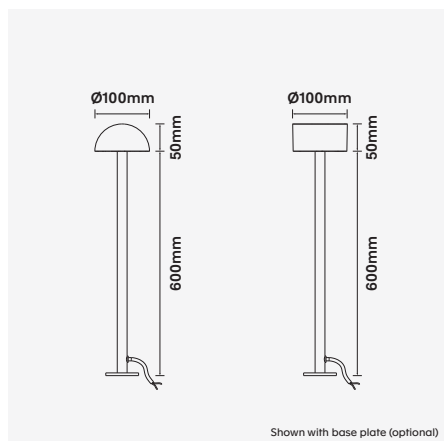

2200K/3000K Selectable



Accessories

**DUSK-BL65-BASE**  
Surface mount base only  
Ø60mm x Height 5mm  
Black surface finish



**DUSK-BL65-300MM-EXT**  
300mm extension post only  
Ø18mm x Length 300mm  
Black surface finish



**DUSK-BL65-CAP-A**  
Dome cap only  
Ø100 x Height 50mm  
Black surface finish



**DUSK-BL65-CAP-B**  
Squared cap only  
Ø100 x Height 50mm  
Black surface finish



**WATTAGE 5W**   
 **Surface**   
 **3-Step**   
 **CRI (Ra) >90**   
 **130°**   
 **IP 66**   
 **CE**   
 **WARRANTY 5YR**

**VOLTAGE 24VDC**   
**CCT Switchable**

Dusk, the IP66 rated modular designed outdoor pathway light with its advanced lens technology offers 130° light distribution. The twist and lock dome or cylindrical interchangeable covers and push button selectable CCT options of 2200K or 3000K will appeal to Residential, commercial or public space applications.

The triple layered coating is suitable for seaside installations for high corrosion resistance against salt mist. Invisible screws, extension poles for the right height and a choice of spike or surface mounting installation accessories. Extra Low-voltage 24VDC working voltage for additional safety. Dusk with minimalist appearance, perfect to blend into its' environment. Dusk series offers a 5-year warranty.

- Luminaire wattage: 4W (System 5W)
- Luminous flux: 260-390Lm<sup>2</sup>
- Luminaire efficacy: 78Lm/W<sup>1</sup>
- Correlated colour temperature: 2200K-3000K selectable
- Colour rendering index: >80 standard
- Mac-Adams Ellipse: 3-SDCM
- LED brand: Osram SMD LED
- Symmetrical distribution: 130°
- Outer trim Ø100mm x Height 650mm
- Mounting: PC Garden spike (standard), Base plate (optional)
- Ingress protection rating: IP66 standard
- Luminaire finish: Black
- Longevity: >50,000Hrs L80 B10
- Working voltage: 24VDC
- Driver: Requires Remote 24VDC LED driver
- Weight: 450g (excluding driver)
- Warranty: 5 years<sup>4</sup>


Model	LED Output <sup>2</sup>	Luminous Flux <sup>2</sup>	LED Wattage	System Wattage	CCT	CRI <sup>3</sup>	Distribution
DUSK-BL65-X-5W-CCT	350Lm	260Lm	4W	5W	2200K	>80	130°
	510Lm	390Lm	4W	5W	3000K	>80	130°

For Non-dimming add suffix ND  
Please replace X for:  
**A** = DUSK-BL65-CAP-A Domed cap  
**B** = DUSK-BL65-CAP-B Squared cap

Example product order code configuration: DUSK-BL65-A-5W-CCT-ND-(BK)


Model	Cap Type	Wattage	CCT	Distribution	Driver	Luminaire Finish						
DUSK-BL65	+	A	+	5W	+	CCT	+	130	+	ND	+	BK

#### Light Distribution

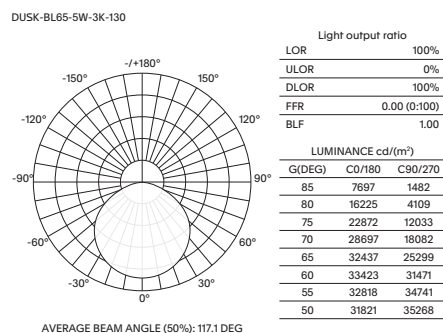

		Utilisation Factors									
		Room Reflectance					Room Index				
Room	Reflectorance	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
Ceiling	70	57	66	74	79	87	92	96	100	103	
Walls	50	57	66	74	79	87	92	96	100	103	
Floor	20	57	66	74	79	87	92	96	100	103	

#### Cone Diagram

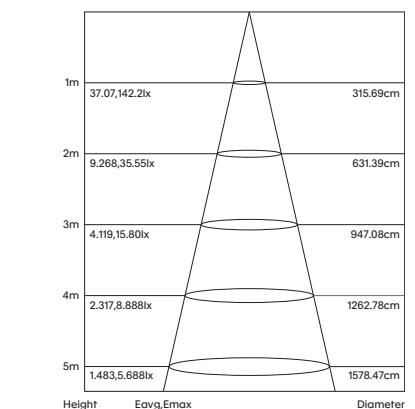

1 Luminaire efficacy based on CCT 3000K; CCT variation will alter efficacy  
2 +/- 10% stated initial LED and luminous flux tolerance  
3 Colour Rendering Index: >80 Standard (Osram SMD LED)  
4 Five year manufacturer's warranty covering product defects and performance deficiencies