



Trix-WL95

5W Recessed Trimless Asymmetrical Landscape Luminaire

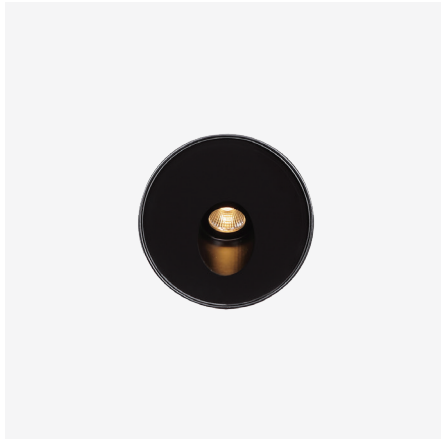


Luminaire Finish

Black (BK)

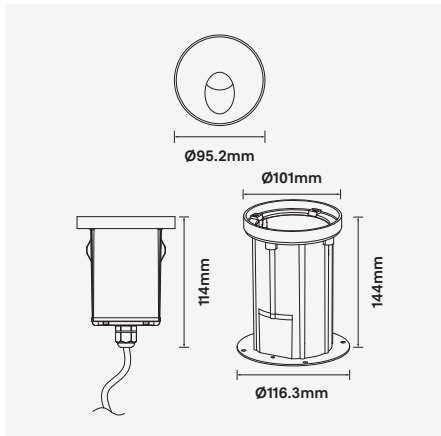

Water Stopper (Included)

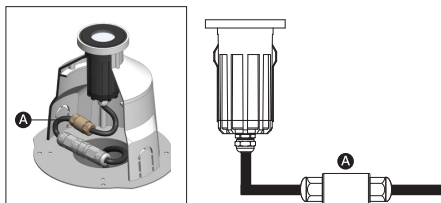

The Trix recessed landscape luminaire will generate high internal temperatures whilst in use. This will generate a negative pressure once the luminaire is turned on, enabling water and vapours to be sucked into the fitting and causing irreparable damage. For this reason, a water stopper is fitted as standard across the entire Trix series.

WATTAGE 5W
3-Step
IP 67
IK 06
Bluetooth
CE
WARRANTY 5YR

VOLTAGE 24VDC
CRI (Ra) >80
Recessed
Asymmetrical

Trix-WL95 is part of the contemporary trimless series of landscape architectural recessed luminaires. With a jet black glass fascia that sets it apart from other inground lights it is sleek and frameless. It's extra low-voltage, 24VDC power input makes it suitable for children's play areas, public spaces, shopping precincts, commercial environments and residential spaces.

Constructed from quality die-cast aluminium and a toughened glass fascia for extended durability, the Trix integrates class leading NICHIA COB LED technology as standard with a range of distribution options. Optional DALI-2 and BLE dimming on request, the Trix-WL95 comes with a 5 year warranty.

- Luminaire wattage: 5W (System 5.6W)
- Luminous flux: 355-744Lm²
- Luminaire efficacy: 63.39Lm/W¹
- Correlated colour temperature: 3000K, 4000K
- Colour rendering index: >80³
- Mac-Adams Ellipse: 3-SDCM
- LED brand: NICHIA COB LED
- Distribution: Asymmetrical
- Fitting Ø95.2mm x Height 114mm
- Ingress protection rating: IP67
- Impact protection: IK06
- Luminaire finish: Black Glass
- Glass Pressure Capacity: Full area=2436Kgs
- Longevity: >50,000hrs L80 B10
- Nominal Working Voltage: 24VDC
- Driver: Requires Remote 24VDC non-dimmable LED driver
- Dimming: DALI-2 & BLE (basicDIM Wireless / Casambi) optional⁴
- Weight: 1.05kg (Exc. driver)
- Warranty: 5 years⁵


Model	Luminous Flux ²	LED Wattage	System Wattage	CCT	CRI ³	Distribution
TRIX-WL95-5W-3K	355Lm	5W	5.6W	3000K	>80	Asymmetrical
TRIX-WL95-5W-4K	744Lm	5W	5.6W	4000K	>80	Asymmetrical

For Non-dimming add suffix ND
For DALI-2 dimming add suffix D
For BLUETOOTH dimming add suffix BT


Example product order code configuration: TRIX-WL95-5W-3K-ASY-ND-BK

Model	Wattage	CCT	Distribution	Driver	Luminaire Finish					
TRIX-WL95	+	5W	+	3K	+	ASY	+	ND	+	BK


Light Distribution

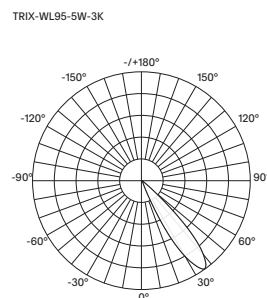


Cone Diagram

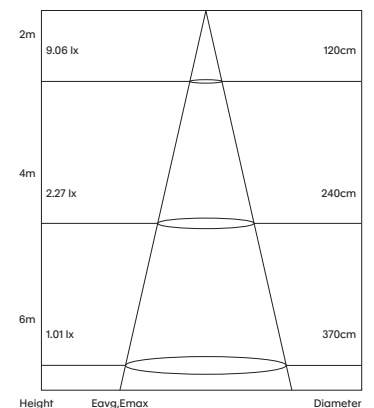

Wall Washer Application



Inground Application



1 Luminaire efficacy based on CCT 3000K; CCT variations will alter efficacy
2 +/- 10% stated initial LED and luminous flux tolerance
3 Colour rendering Index: >80 standard (NICHIA COB Series)
4 Charges apply for non-standard colour/s and dimming options
5 Five year manufacturer's warranty covering product defects and performance deficiencies