


## Vesta-FL

↓ 25W / ↑ 25W Architectural  
Direct / Indirect Floor Luminaire



Luminaire Finishes

White (WH)   
  Black (BK)   
  Silver (SV)

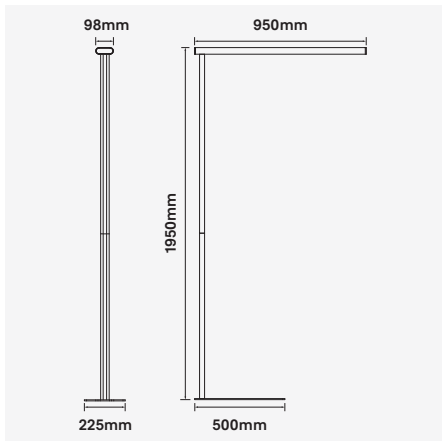

|             |                |                           |       |         |    |              |
|-------------|----------------|---------------------------|-------|---------|----|--------------|
| WATTAGE 50W | VOLTAGE 240VAC | CRI (Ra) >80              | IP 20 | UGR <19 | CE | WARRANTY 5YR |
| 3-Step      |                | 90° DIRECT, 110° INDIRECT |       |         |    |              |

Vesta is part of a series of well designed free standing luminaires. Functional and minimal by design, Vesta is an elegant lighting solution for any open plan work area, work station or office desk. Designed for both direct and indirect illumination, with a 90° direct and 110° diffused indirect light source, Vesta includes micro prismatic light guides for the ultimate in anti-glare with a UGR (Unified Glare Rating) as low as <19. Vesta comes with a 5 year warranty.

- Luminaire wattage: 25W (Direct), 25W (Indirect)
- Luminous flux: 2450Lm (Direct), 2450Lm (Indirect)<sup>2</sup>
- Luminaire efficacy: 97Lm/W<sup>1</sup>
- Correlated colour temperature: 3000K, 4000K, 5700K
- Colour rendering index: >80<sup>3</sup>
- Mac-Adams Ellipse: 3-SDCM
- LED brand: Samsung SMD LED
- Glare control: UGR<19
- Symmetrical distribution: 90° (Direct), 110° (Indirect)
- Luminaire Width 98mm x Length 950mm x Height 1950mm
- Installation: Free standing
- Ingress protection rating: IP20
- Luminaire finishes: White, Black, Silver
- Longevity: >50,000Hrs L80 B10
- Switching: on/off push button
- Weight: 9Kg (Floor mnt.)
- Warranty: 5 years<sup>4</sup>


| Model            | Luminous Flux <sup>2</sup>   | System Wattage         | CCT   | CRI <sup>3</sup> | Distribution            |
|------------------|------------------------------|------------------------|-------|------------------|-------------------------|
| VESTA-FL-50W-3K  | 1800Lm (Dir.), 2800Lm (Ind.) | 25W (Dir.), 25W (Ind.) | 3000K | >80              | 90° (Dir.), 110° (Ind.) |
| VESTA-FL-50W-4K  | 2044Lm (Dir.), 3170Lm (Ind.) | 25W (Dir.), 25W (Ind.) | 4000K | >80              | 90° (Dir.), 110° (Ind.) |
| VESTA-FL-50W-57K | 2300Lm (Dir.), 3500Lm (Ind.) | 25W (Dir.), 25W (Ind.) | 5700K | >80              | 90° (Dir.), 110° (Ind.) |

Example product order code configuration: VESTA-FL-50W-57K-90/110-(WH)

| Model    | Wattage | CCT | Distribution | Luminaire Finish |   |        |   |    |
|----------|---------|-----|--------------|------------------|---|--------|---|----|
| VESTA-FL | +       | 50W | +            | 57K              | + | 90/110 | + | WH |

### Light Distribution

VESTA-FL-80W-4K

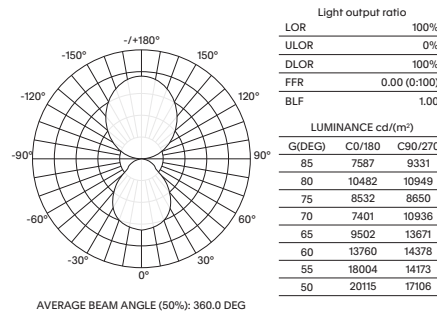

| Room Reflectance |             | Utilisation Factors |      |      |      |      |      |      |      |      |  |
|------------------|-------------|---------------------|------|------|------|------|------|------|------|------|--|
| Ceiling          | Walls/Floor | Room Index          |      |      |      |      |      |      |      |      |  |
| 70               | 50   20     | 0.80                | 1.00 | 1.25 | 1.50 | 2.00 | 2.50 | 3.00 | 4.00 | 5.00 |  |
|                  |             | 41                  | 48   | 54   | 59   | 66   | 60   | 70   | 74   | 78   |  |

### Cone Diagram

