
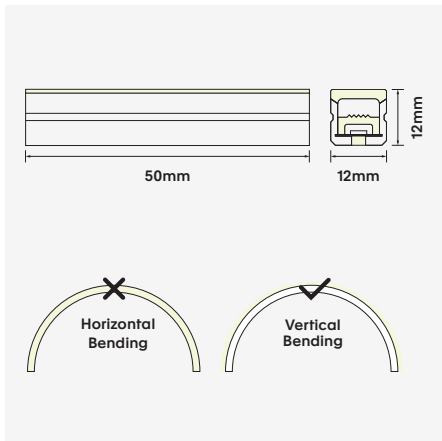


## INTENSE-T-1212-RGB

### 5W / 10W Flexible RGB Top Bend Neon Flex

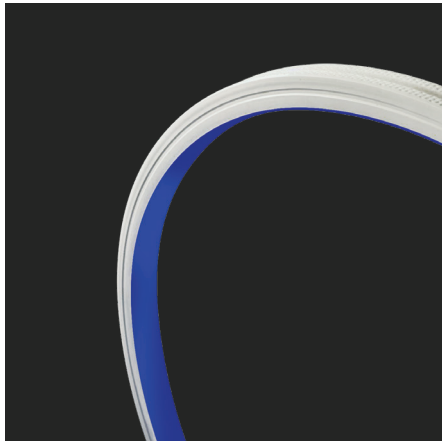

#### Power feed options

INTENSE-T-1212-EC  
Silicone end cap



INTENSE-T-1212-PFE  
Power feed - End



INTENSE-T-1212-PFB  
Power feed - Bottom



INTENSE-T-1212-PFL  
Power feed - Left



INTENSE-T-1212-PFR  
Power feed - Right



#### Accessories

INTENSE-T-1212-X  
MC Mounting Clip 25mm  
MP Mounting Profile 1m



Intense-T-Colour series presents a dynamic, colourful and versatile 24V flexible top bending LED neon system for a range of applications. With the ability to adjust colour and create dynamic lighting states, Intense-T-1212 -RGB can produce dramatic or subtle lighting effects for interior and exterior environments. Intense-T-1212-RGB can be utilised in pelmets, coffers and handrails through to landscape architecture uses such as seating, retaining walls, facade lighting and more.

Features a high quality silicon construction, that's flexible and UV stable while providing a continuous dot free line of light. With DALI, Bluetooth and DMX-512 controls available on request, the Intense series comes with a 5 year warranty.

- Luminaire wattage/m: 5W, 10W
- Luminous flux/m: 154.07Lm, 265.49Lm<sup>2</sup>
- Luminaire efficacy: 30.81Lm/W, 26.56Lm/W<sup>1</sup>
- Peak wavelength / Dominant: Red: 632nm; Green 517nm; Blue 462nm
- Single Bin CCT selection
- LED source / Quantity: SMD5050; 96pcs/m
- Symmetrical distribution: 120°
- Minimum cuttable section: 62.5mm (group of 6 x SMD LED)
- Ingress protection rating: IP67
- Longevity: >50,000Hrs L80
- Installation: Aluminium mounting clips or Aluminium linear profile optional<sup>3</sup>
- Driver: Requires constant voltage 24VDC non dimmable LED driver as standard<sup>3</sup>
- Dimming: Remote DALI-2/DSI, BLE (basicDIM Wireless/Casambi), DMX-512 on request<sup>3</sup>
- Warranty: 5 years<sup>4</sup>

Model	Colour	Peak Wavelength /CCT	Luminous Flux/m <sup>2</sup>	LED Wattage /m	Distribution	Number of LED/m	Maximum Continuous Length/m
INTENSE-T-1212 -5W-RGB	Red Green Blue	632nm 517nm 462nm	145Lm	5W	120°	120	5m
INTENSE-T-1212 -10W-RGB	Red Green Blue	632nm 517nm 462nm	290Lm	10W	120°	120	5m


For DALI DT8 dimming add suffix D  
For BLUETOOTH dimming add suffix BT  
For DMX Control, add suffix DMX

Example product order code configuration: INTENSE-T-1212-10W-RGB-DMX

Model	Wattage	CCT	Driver
INTENSE-T-1212	10W	RGB	DMX

#### Light Distribution

INTENSE-T-1212-10W-RGB

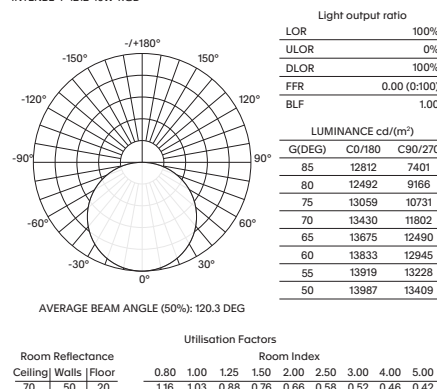

#### Cone Diagram

