

Ghost-5030-REC

Recessed Mounted Linear LED Profile



Luminaire Finishes

- White (WH)
 Black (BK)
 Custom
 Natural Anodised (NA)

Profile

Aluminium Profile

Part No: GHOST-5030-REC-AP
Per metre

For Black / White / Natural Anodised, add suffix -BK / -WH / -NA



Accessories

Spring Mounting Clips⁴

Part No: GHOST-5030-REC-SPR
Set of 2 pcs/set



End Caps

Part No: GHOST-5030-REC-EC
Set of 2 pcs/set

For Black / White / Natural Anodised, add suffix -BK / -WH / -NA



Recessed  110°  IP 44  WARRANTY 5YR






Ghost linear profile series offers new lighting possibilities to suit a wide range of applications. Specifically designed for recessed applications.

Constructed from high grade 6063T extruded aluminium with a natural anodised surface treatment as standard for an architectural appearance. High quality opal PMMA diffuser minimises the visibility of dots when used in conjunction with CoLab's vast LED strip portfolio.

- Mounting: Recessed mounting applications
- Construction: Extruded 6063T grade aluminium mounting profile
- Finish Options: Natural anodised, White, Black and custom colours optional¹
- Diffuser: Opal PMMA
- Symmetrical Distribution: 110°
- Accessories: Mounting clips & end caps included⁴
- Dimensions: W 50mm x H 33mm x L 2500mm
- Ingress protection rating: IP44
- Specifically designed for Zeroflex, Deltaflex and Powerflex LED series strip lights³
- Warranty: 5 years⁵

Compatible LED strip lighting²:













Deltaflex³


5W - 120 LEDs/m	 2700K - 420Lm/m	 3000K - 440Lm/m	 4000K - 480Lm/m
10W - 120 LEDs/m	 2700K - 780Lm/m	 3000K - 786Lm/m	 4000K - 810Lm/m
15W - 120 LEDs/m	 2700K - 1103Lm/m	 3000K - 1248Lm/m	 4000K - 1286Lm/m
20W - 120 LEDs/m	 2700K - 1378Lm/m	 3000K - 1507Lm/m	 4000K - 1604Lm/m
23W - 224 LEDs/m	 2700-6500K - 2407Lm/m		
20W - 96 LEDs/m	 880Lm/m		
30W - 96 LEDs/m	 1659Lm/m		

Zeroflex³

10W - 480 LEDs/m	 3000K - 900Lm/m	 4000K - 1000Lm/m
15W - 480 LEDs/m	 3000K - 1350Lm/m	 4000K - 1500Lm/m

Powerflex³

10W - 160 LEDs/m	 2700K - 1344Lm/m	 3000K - 1411Lm/m	 4000K - 1536Lm/m
12W - 160 LEDs/m	 2700K - 1680Lm/m	 3000K - 1764Lm/m	 4000K - 1920Lm/m
18W - 160 LEDs/m	 2700K - 2520Lm/m	 3000K - 2646Lm/m	 4000K - 2880Lm/m
21W - 160 LEDs/m	 2700K - 2940Lm/m	 3000K - 3087Lm/m	 4000K - 3360Lm/m

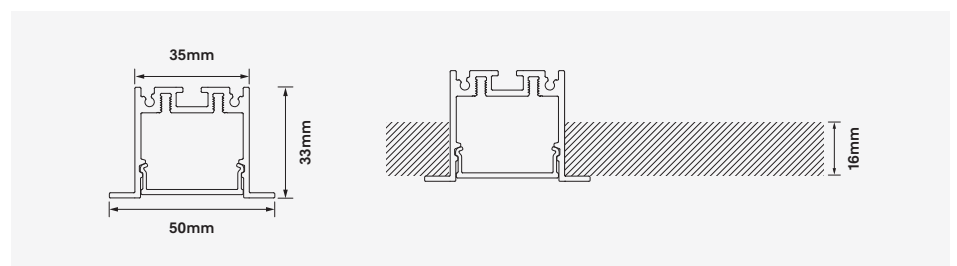

¹ Natural Anodised standard; White, Matt Black or Custom colours will incur a surcharge

² LED strip not included

³ Refer to Deltaflex, Zeroflex & Powerflex datasheet for detailed technical information

⁴ Mounting clips are included on a basis of 2 pcs/m. Additional will incur a charge

⁵ Five year manufacturer's warranty covering product defects and performance deficiencies