


Hydra-A95

2W Recessed Adjustable Landscape Luminaire




Luminaire Finish

Stainless Steel (SS)

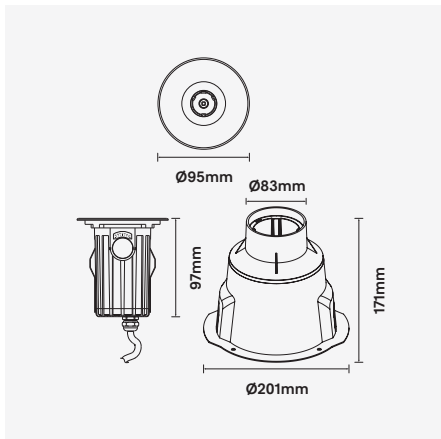

Water Stopper (Included)

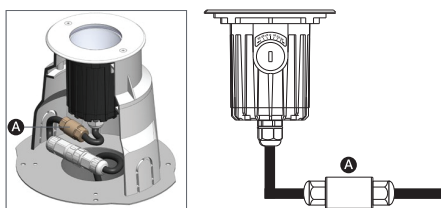

The Hydra recessed landscape luminaire will generate high internal temperatures whilst in use. This will generate a negative pressure once the luminaire is turned off enabling water and vapours to be sucked into the fitting and causing irreparable damage. This is why this device is fitted as standard to the entire Hydra series.

WATTAGE 2W **± 30° Tilt** **IP 67** **IK 09** **Bluetooth** **CE** **WARRANTY 5YR**
VOLTAGE 24VDC **3-Step** **CRI (Ra) >80** **9° / 15° / 20° / 45°** **Recessed**

Hydra-A95 is part of the expansive Hydra Series of tilt adjustable recessed luminaires. Versatile and extremely flexible with an extra low-voltage DC24V power input it is suitable for children's play areas, public spaces, shopping precincts, commercial and residential spaces.

Hydra is constructed from quality die-cast aluminium and a CNC machined stainless steel fascia for extended durability. Using tempered glass with an IK09 rating and a drive over rating of 1195kg it is tilt adjustable for precise illumination. Hydra offers class leading LED technology from NICHIA as standard and utilises a wide range of optical distributions. A honeycomb anti-glare louvre also incorporated to aid in visual comfort.

Hydra comes as standard with on/off controls and optional DALI dimming on request. The Hydra-A95 Series comes with a 5 year warranty.

- Luminaire wattage: 2W (System 3W)
- Luminous flux: 112-147Lm²
- Luminaire efficacy: 43.08Lm/W¹
- Correlated colour temperature: 3000K, 4000K
- Colour rendering index: >80³
- Mac-Adams Ellipse: 3-SDCM
- LED brand: NICHIA COB LED
- Glare control: Low glare Honeycomb Louvre
- Symmetrical distribution: 9°, 15°, 20°, 45°
- Adjustability: ±30° tilt function
- Fitting Ø95mm Trim x Height 97mm; Recessed Sleeve Ø83mm Trim x Height 171mm x Base Ø201mm
- Ingress protection rating: IP67
- Impact protection: IK09
- Fascia: 316# stainless steel
- Glass Pressure Capacity: Full area=1195Kgs
- Longevity: >50,000hrs L80 B10
- Nominal Working Voltage: 24VDC
- Driver: Requires 24VDC constant voltage LED driver, non-dimmable
- Dimming: DALI-2 & BLE (basicDIM Wireless) optional⁴
- Weight: 720g (excl. driver)
- Warranty: 5 years⁵


Model	Luminous Flux ²	LED Wattage	System Wattage	CCT	CRI ³	Distribution
HYDRA-A95-2W-3K	112Lm	2W	3W	3000K	>80	9°, 15°, 20°, 45°
HYDRA-A95-2W-4K	147Lm	2W	3W	4000K	>80	9°, 15°, 20°, 45°

For Non-dimming add suffix ND
For DALI-2 dimming add suffix D
For BLUETOOTH dimming add suffix BT


Example product order code configuration: HYDRA-A95-2W-3K-20-ND-SS

Model	Wattage	CCT	Distribution	Driver	Luminaire Finish					
HYDRA-A95	+	2W	+	3K	+	20	+	ND	+	SS

Light Distribution

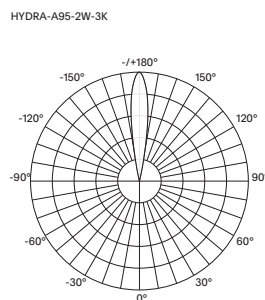

Cone Diagram

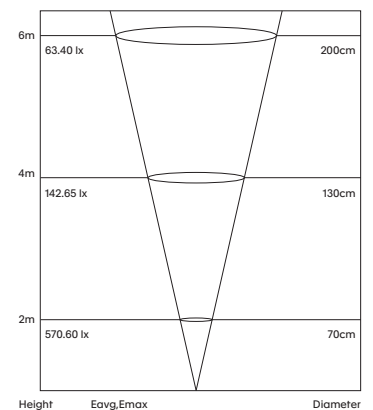

1 Luminaire efficacy based on CCT 3000K; CCT variations will alter efficacy
2 +/- 10% stated initial LED and luminous flux tolerance
3 Colour rendering Index: >80 standard (NICHIA COB Series)
4 Additional charges apply for non-standard colour/s and dimming options
5 Five year manufacturer's warranty covering product defects and performance deficiencies