

Fleur-F35

5W Fixed LED Recessed Downlight




Luminaire Finishes

White (WH)

Glass Finishes

Amber (AM)

Smoke Grey (SG)

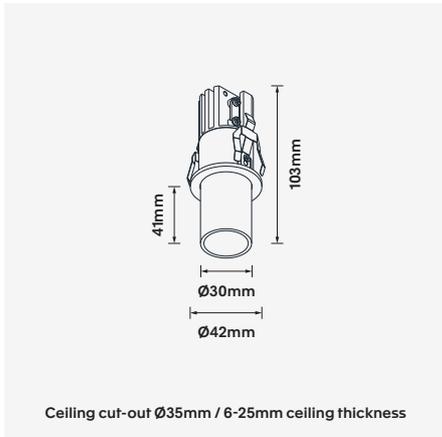

WATTAGE 5W
Ø 35
IP 44
30°
Bluetooth
CE
WARRANTY 5YR

3-Step
CRI (Ra) >90
MAINS DIM

Fleur-F35 is a small, decorative luminaire with a protruding amber or smoke grey glass that extends slightly below the ceiling line. A LED ceiling recessed luminaire providing symmetrical distribution with a high quality construction and a unique appearance.

Fleur-F35 offers an alternative to traditional lighting and downlights. With a miniature cutout, white frame and transparent glass it is a great addition to low lit environments such as theatre rooms, hotel lobbies and bars. Available in a range of colour temperatures and dimming options while utilising a Bridgelux COB LED. Mains dimming as standard with optional DALI-2 and Bluetooth dimming. Fleur-F35 offers a 5 year warranty.

- Luminaire wattage: 5W (system 7W)
- Luminous flux: 286-300Lm²
- Luminaire efficacy: 40.85Lm/W¹
- Correlated colour temperature: 3000K, 4000K
- Colour rendering index: >90³
- Mac-Adams Ellipse: 3-SDCM
- LED Brand: Bridgelux COB LED
- Symmetrical distribution: 30°
- Outer trim Ø42mm; ceiling cut-out Ø35mm
- Ingress protection rating: IP44
- Luminaire finishes: White
- Glass colour: Amber, Smoke grey
- Longevity: >50,000Hrs L80 B10
- Driver: Mains dimmable LED driver standard
- Dimming: DALI-2, BLE (basicDIM Wireless / Casambi) on request⁴
- Weight: 95g (excluding driver)
- Warranty: 5 years⁵


Model	LED Output ²	Luminous Flux ²	LED Wattage	System Wattage	CCT	CRI ³	Distribution
FLEUR-F35-5W-3K	608Lm	286Lm	5W	7W	3000K	>90	30°
FLEUR-F35-5W-4K	640Lm	300Lm	5W	7W	4000K	>90	30°

For MAINS dimming add suffix MD
For DALI-2 dimming add suffix D
For BLUETOOTH dimming add suffix BT


Example product order code configuration: FLEUR-F35-5W-3K-30-MD (WH/AM)

Model	Wattage	CCT	Distribution	Driver	Luminaire Finish / Glass Finish					
FLEUR-F35	+	5W	+	3K	+	30	+	MD	+	(WH/AM)

Light Distribution



Cone Diagram

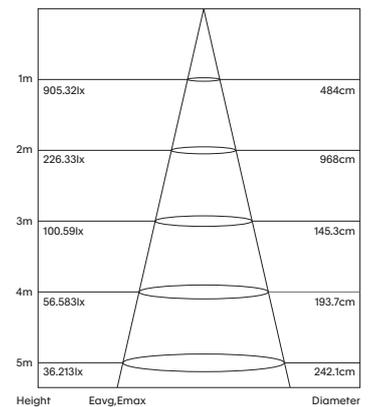

1 Luminaire efficacy based on CCT 3000K; CCT variation will alter efficacy
2 +/- 10% stated initial LED and luminous flux tolerance
3 Colour rendering index: >90 standard (Bridgelux COB Series)
4 Additional charges apply for non-standard colour/s and dimming options
5 Five year manufacturer's warranty covering product defects and performance deficiencies