


Kobe-WLS

3W Recessed Square Wall Luminaire



Luminaire Finishes

White / Black (WH/BK)
 Black / Black (BK/BK)

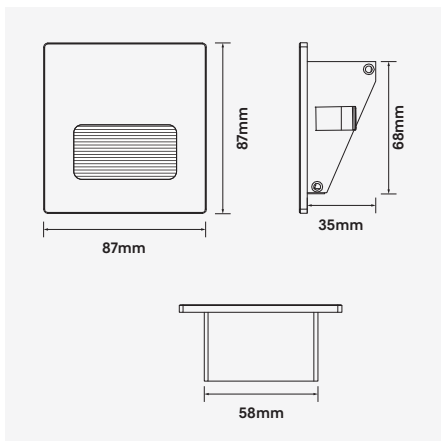

Accessories

KOBE-WLS-BOX
Polycarbonate concrete housing
W82mm x H82mm x D50mm



WATTAGE 3W

VOLTAGE 240VAC

73x73

CRI (Ra) >90

IP 44

CE

WARRANTY 5YR

3-Step

Asymmetrical

Low Glare

Wall mount

Kobe forms part of a series of step, corridor and room luminaires and consists of a special optical design for low glare and optimum illumination.

Featuring a minimal design which is able to be integrated into a range of applications, Kobe is manufactured using aluminium components and a polycarbonate lens.

Installation for the Kobe is made using a mounting spring for plaster board applications or with an polycarbonate housing for brick or concrete walls. Kobe comes with an integral non-dimmable led driver as standard and a 5 year warranty.

- Luminaire wattage: 3W (System 3.3W)
- luminous flux: 9.39Lm²
- Luminaire efficacy: 2.87Lm/W¹
- Correlated colour temperature: 3000K, 4000K
- Colour rendering index: >90³
- Mac-Adams Ellipse: 3-SDCM
- LED brand: CREE SMD
- Direct light output ratio (LOR): 100%
- Upward light output ratio (ULOR): 0.0%
- Asymmetrical distribution
- Fascia Width 87mm² x Depth 35mm
- Ingress protection rating: IP44 standard
- Luminaire finishes: White/Black, Black
- Longevity: >50,000hrs L70 B10
- Driver: Integral 240VAC non-dimmable standard
- Weight: 195g (including driver)
- Warranty: 5 years⁴


Model	Luminous Flux ²	LED Wattage	System Wattage	CCT	CRI ³	Distribution
KOBE-WLS-3W-3K-ASY	9.39Lm	3W	3.3W	3000K	>90	Asymmetrical
KOBE-WLS-3W-4K-ASY	5.79Lm	3W	3.3W	4000K	>90	Asymmetrical

For Non-dimming add suffix ND


Example product order code configuration: KOBE-WLS-3W-3K-ASY-ND-(WT/BK)

Model	Wattage	CCT	Distribution	Driver	Luminaire Finish					
KOBE-WLS	+	3W	+	3K	+	ASY	+	ND	+	WT/BK

Light Distribution



Cone Diagram

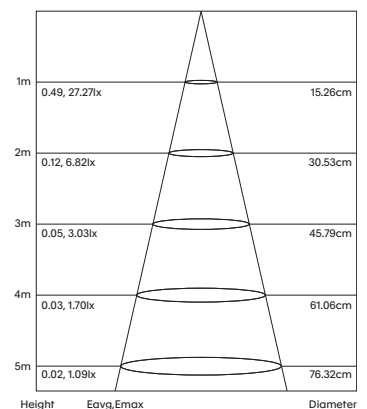

1 Luminaire efficacy based on CCT 3000K; CCT in variation will alter efficacy
 2 +/- 10% stated initial LED and luminous flux tolerance
 3 Colour Rendering Index: >90 Standard; (CREE SMD series)
 4 Five year manufacturer's warranty covering product defects and performance deficiencies