

Contents

Recessed Downlights

Arcane-F Series	4
Ario-F Series	6
Blip-F20	8
Bobo-F65	10
Bono-A Series	12
Bubbles-F35	14
Carter-F Series	16
Evolution Series	18
Fleur	20
Hera-F Series	22
Hera-W Series	24
Kuppel-F Series	26
Kuppel-FS Series	28
Linie-F Series	30
Linie-IP-F Series	32
Linie-W Series	34
Morq-A Series	36
Nebula-F Series	38
Pandora-F Series	40
Peeper-F Series	42
Point-F35	44
Polkadot-F Series	46
Recco-A Series	48
Recco-AS Series	50
Recco-F Series	52
Recco-FS Series	54
Recco-W Series	56
Recco-WS Series	58
Smooth Series	60
Spy-A Series	62
Tacca-F20	64
Twist Series	66
Versa-A83	68
Vibes Series	70
Void-F Series	72

Surface Downlight

Axes-SM Series	76
Index-SM Series	78
Kuppel-SMF Series	80
Linie-SM Series	82
Meko-SM Series	84
Momo-SM Series	86
Muse-SM Series	88
Peeper-SM Series	90
Warp-SM Series	92

Arcane-F Series

3W-10W Fixed Mini LED Recessed Downlight


LED ceiling recessed luminaire providing symmetrical, low-glare light distribution. The Arcane-F Series downlight offers optimised performance, high colour consistency and a minimal design.

A protection rating of IP44 makes the Arcane-F Series a versatile choice for a range of general lighting applications. Arcane-F Series utilises Cree LED technology and offers a 5 year warranty.

Standard



Optionals

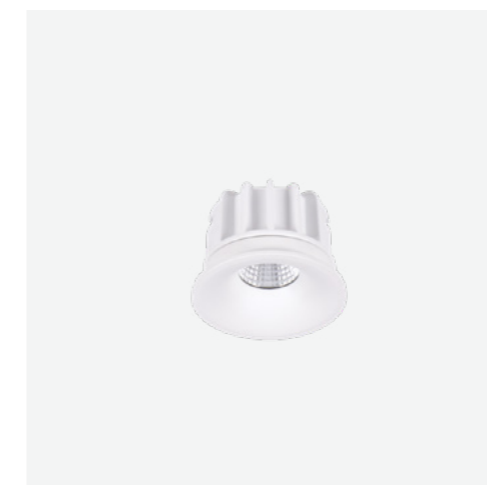

Arcane-F44


Finish Options: White Black

CCT: 2700K 3000K 4000K

Wattage: 3W (System 4W)

Beam: 48°

Ceiling cut-out Ø44mm / 6-25mm ceiling thickness



Arcane-F82


Finish Options: White Black Custom

CCT: 2700K 3000K 4000K

Wattage: 10W (System 12W)

Beam: 38°

Ceiling cut-out Ø82mm / 6-25mm ceiling thickness

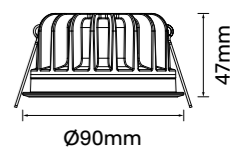

Ario-F Series

13W-52W Fixed LED Recessed Downlight

The Ario-F Series LED downlight series offers optimised and efficient performance with symmetrical, low-glare light distribution. The recessed LED architectural luminaire has a shallow depth for low height ceiling voids, IP44 protection (IP65 optional) and optional baffle finishes to suit a multitude of applications.

Available in a range of colour temperatures, wattage / lumen packages, levels of protection, mounting accessories and dimming options. Made with a die-cast aluminium and polyamide housing, high purity aluminium reflector, high-grade polycarbonate secondary baffle optic and precision-formed Degussa diffuser.

Integrating Zhaga compliant Citizen LED technology, coupled with Tridonic LED driver, the Ario-F Series comes with a 5 year warranty.

Standard

IP 44 / 65
IK 10
UGR <19


3-Step
CRI (Ra) >83 / >90
Z

COI ON REQUEST
CE
△

WARRANTY 5YR

Optionals

Bluetooth
RAI

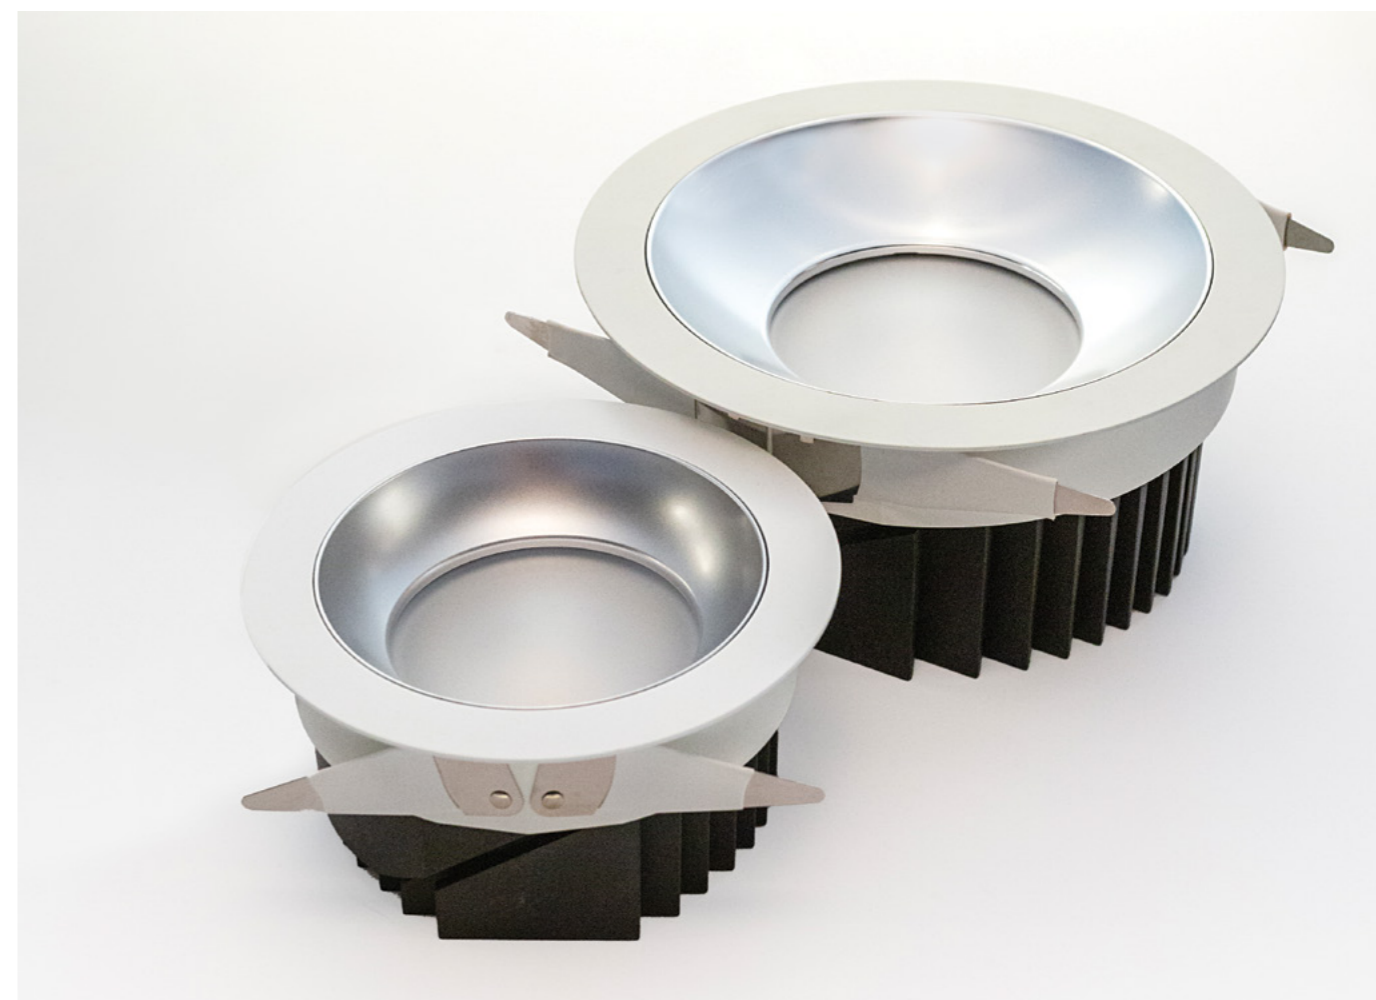

Ario-F125

Finish Options: White Black


Baffle Colour: White Matt Specular

CCT: 3000K 4000K

Wattage: 13W (System 15W) | 18W (System 21W)

Beam: 60°

Ceiling cut-out Ø125 mm / 6-25mm ceiling thickness



Ario-F205H

Finish Options: White Black


Baffle Colour: White Matt Specular

CCT: 3000K 4000K

Wattage: 38W (System 42W) | 52W (System 56W)

Beam: 50°

Ceiling cut-out Ø205mm / 6-25mm ceiling thickness

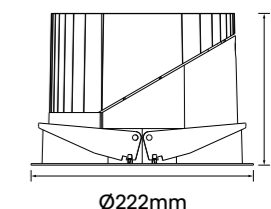

Ario-F150

Finish Options: White Black


Baffle Colour: White Matt Specular

CCT: 3000K 4000K

Wattage: 18W (System 21W) | 26W (System 28W)

Beam: 60°

Ceiling cut-out Ø150 mm / 6-25mm ceiling thickness



Ario-F205L

Finish Options: White Black


Baffle Colour: White Matt Specular

CCT: 3000K 4000K

Wattage: 26W (System 28W) | 38W (System 42W)

Beam: 70°

Ceiling cut-out Ø205mm / 6-25mm ceiling thickness

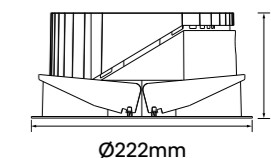



Blip-F20


1W Fixed LED Recessed Downlight

A decorative, ceiling recessed LED luminaire providing symmetrical distribution and manufactured using quality components and processes.


Blip's appearance is akin to that of a water droplet creating a look that is both unique and an attractive alternative to traditional star point lighting and downlights.

A miniature cutout, white frame and clear glass are features that allow Blip to shine, creating an understated yet provocative lighting effect to a room. Blip is an exciting element to add in low lit environments such as theatre rooms, hotel lobbies and bars. Blip comes in a range of colour temperatures and it's 24V working voltage installation makes it fast and safe. DALI-2 and Bluetooth dimming options available. Blip-F Series offers a 5 year warranty

Standard

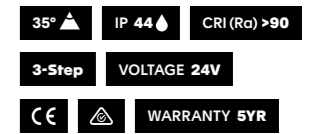

Optionals

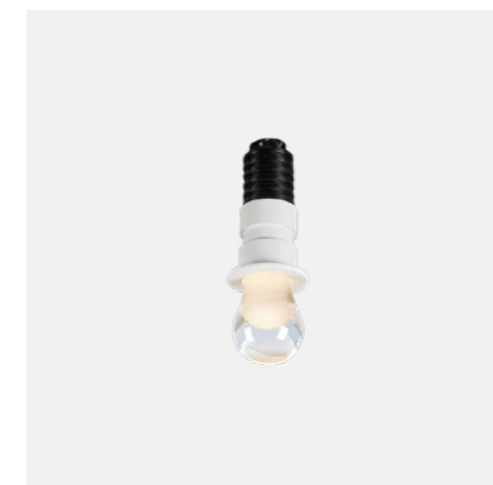

Blip-F20

Finish Options: White


Glass Finish: Crystal

CCT: 3000K 4000K

Wattage: 1W

Beam: 35°

Ceiling cut-out Ø20mm / 6-25mm ceiling thickness





Bobo-F65

10W Fixed LED Recessed Downlight

Bobo-F65 is a deep-set, low glare recessed LED luminaire with a unique trim design that extends slightly below the ceiling line providing a unique delicate look. Available in a range of beam angles and baffle colours, it is made of high quality materials including a die-cast aluminium housing and a high quality optic lens.

Bobo's simple and efficient design allows for ease of maintenance and adaptability. It has been purpose built for various residential, hotel and commercial applications. Integrating Zhaga compliant Bridgelux LED technology and non-dimmable, DALI-2 or BLE dimming options. Bobo-F65 offers a 5 year warranty.

Standard

IP 40 UGR <19 CRI (Ra) >90
 3-Step Z CE
 WARRANTY 5YR

Optionals

Bluetooth DALI



Bobo-F65

Finish Options: White Black


Baffle Colour: White Black Silver
 Gold Red Rose Gold

CCT: 2700K 3000K 4000K

Wattage: 10W (System 11W)

Beam: 15° | 25° | 38° | 50°

Ceiling cut-out Ø65mm / 6-25mm ceiling thickness

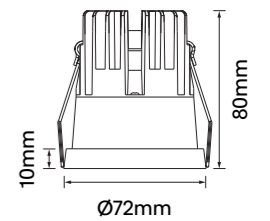



Bono-A Series

6W-10W Adjustable LED Recessed Downlight

An adjustable, recessed, architectural downlight that provides symmetrical, low-glare light distribution in a deep set housing. The minimal design and high efficiency of the Bono-A105 makes it suitable for a wide range of applications. The different trim and baffle options provide adaptability to suit a variety of environments in both commercial and residential spaces.

Features a Zhaga compliant LED from industry leading Bridgelux. A wide range of colour temperatures and dimming options from mains-dimming through to DALI-2 and Bluetooth. Bono-A series offers a 5 year warranty.

Standard



Optionals



Bono-A75

Finish Options: White Black


Baffle Colour: White Black Gold

CCT: 3000K 4000K

Wattage: 6W (System 7W)

Beam: 38°

Ceiling cut-out Ø75 mm / 6-25mm ceiling thickness



Bono-A105

Finish Options: White Black


Baffle Colour: White Black Gold

CCT: 3000K 4000K

Wattage: 10W (System 12W)

Beam: 35°

Ceiling cut-out Ø105 mm / 6-25mm ceiling thickness

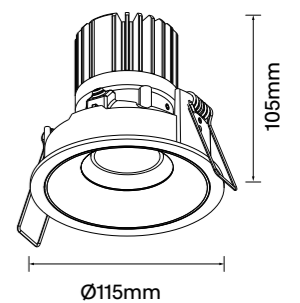

Bubbles-F35

5W Fixed LED Decorative Downlight

Bubbles is a decorative, ceiling recessed LED luminaire with a small, spherical shaped light that protrudes from the ceiling providing symmetrical distribution. An attractive alternative to traditional star point lighting and downlights, Bubbles-F35 features a miniature cutout, white frame, frosted glass and is manufactured using quality components and processes.



Perfect for low lit environments such as theatre rooms, hotel lobbies and bars. Bubbles comes in a range of colour temperatures and dimming options. Available in DALI-2 and Bluetooth dimming options. Bubbles series offers a 5 year warranty.

Standard

IP 44  CRI (Ra) >90  3-Step 
MAINS DIM    
WARRANTY 5YR

Optionals

Bluetooth  

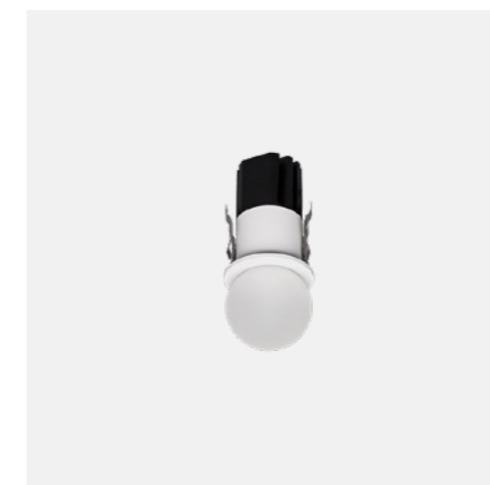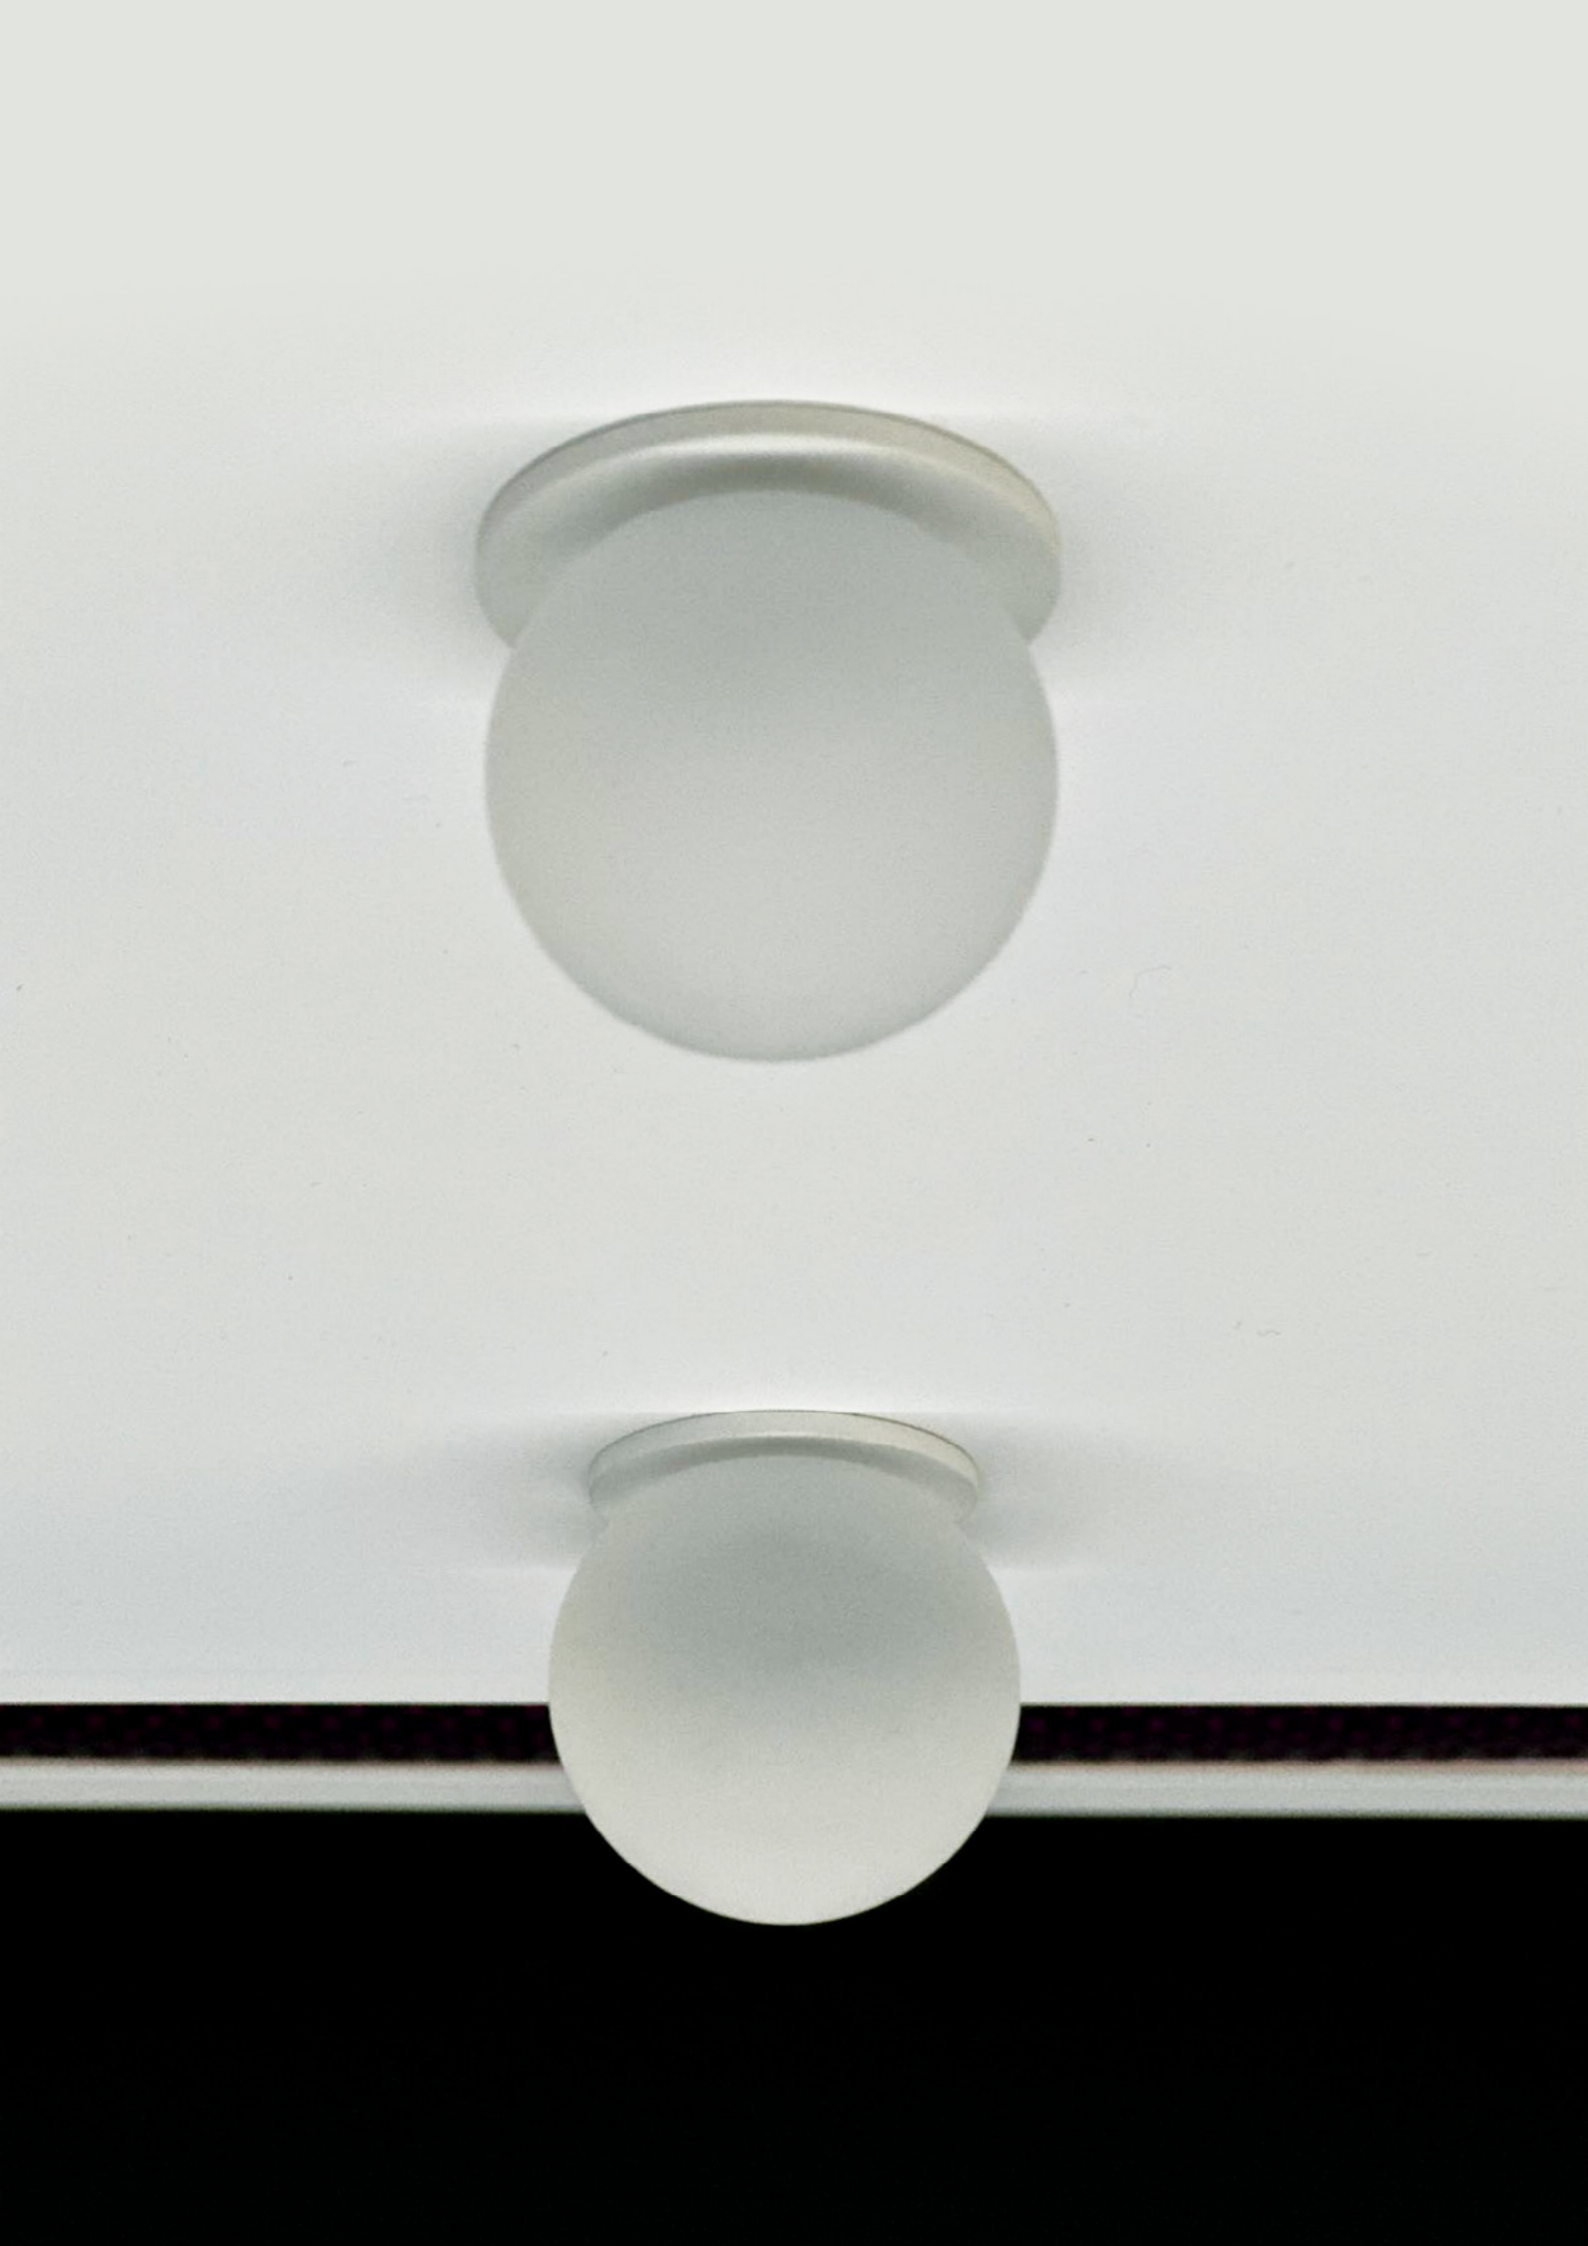

Bubbles-F35

Finish Options: White


Glass Finish: Frosted

CCT: 3000K 4000K

Wattage: 5W (System 7W)

Beam: 35°

Ceiling cut-out Ø35mm / 6-25mm ceiling thickness

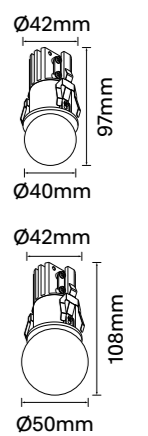

Carter-F Series

10W-35W Fixed IP Rated LED Recessed Downlight

IP65 rated, recessed, LED luminaire series with a deep set light source, providing symmetrical low glare distribution and efficient performance. Suitable for interior or exterior applications, it is available in a range of wattage/lumen packages and various dimming options.

With a die-cast aluminium housing and aluminium reflector, it is available in black, white and custom finishes. Integrating Zhaga compliant Citizen LED technology with Tridonic control gear, the Carter series comes with a 5 year warranty.

Standard

IP 65
UGR <19
3-Step

CRI (Ra) >83
Z
CE
△

WARRANTY 5YR

Optionals

Bluetooth
Ball



Carter-F90


Finish Options: White Black Custom

CCT: 3000K 4000K

Wattage: 10W (System 13W)

Beam: 60°

Ceiling cut-out Ø90mm / 6-25mm ceiling thickness



Carter-F145


Finish Options: White Black Custom

CCT: 3000K 4000K

Wattage: 20W (System 23W)

Beam: 60°

Ceiling cut-out Ø145mm / 6-25mm ceiling thickness



Carter-F110


Finish Options: White Black Custom

CCT: 3000K 4000K

Wattage: 15W (System 18W)

Beam: 60°

Ceiling cut-out Ø110mm / 6-25mm ceiling thickness



Carter-F200


Finish Options: White Black Custom

CCT: 3000K 4000K

Wattage: 35W (System 39W)

Beam: 70°

Ceiling cut-out Ø200mm / 6-25mm ceiling thickness




Evolution F68

13W / 18W Fixed LED Recessed Downlight

Ceiling recessed luminaire providing symmetrical, low-glare light distribution. The Evolution-F68 recessed luminaire offers optimised performance with a high Colour Rendering Index a standard with a minimal and clean aesthetic. The Evolution-F68 is a high powered and compact alternative suitable for commercial applications.

The downlight's deep-set lamp source ensures optimal glare performance across a range of general indoor applications. Evolution utilises Zhaga compliant Citizen LED COB technology and offers a 5 year warranty

Standard



Optionals




Evolution W68

13W/18W Fixed LED Recessed Wall Washer Downlight

A fixed recessed LED architectural wall washer series providing asymmetric distribution with advanced optics for uniform illuminance. The Evolution wall washer offers optimised performance, delivering high lumen emittance from a compact and efficient luminaire. Constructed from a die-cast aluminium housing with a high purity aluminium reflector and a high-grade polycarbonate secondary reflector.

The Evolution-W68 integrates Zhaga compliant Citizen LED technology, with various dimming options from DALI-2/DSI, corridorFUNCTION, ready2mains and basicDIM Wireless control gear alternatives. 5 year warranty as standard.

Standard



Optionals



Evolution-F68

Finish Options: White Black


Baffle Colour: White Black Specular
 Gold Matt Black Chrome

CCT: 3000K 4000K

Wattage: 13W (System 15W) | 18W (System 21W)

Beam: 18° | 40°

Ceiling cut-out Ø68 mm / 6-25mm ceiling thickness



Evolution-W68

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 13W (System 15W) | 18W (System 21W)

Beam: Asymmetric

Ceiling cut-out Ø68 mm / 6-25mm ceiling thickness





Fleur

5W Fixed LED Decorative Downlight

Fleur-F35 is a small, decorative luminaire with a protruding amber or smoke grey glass that extends slightly below the ceiling line. A LED ceiling recessed luminaire providing symmetrical distribution with a high quality construction and a unique appearance.


Fleur-F35 offers an alternative to traditional lighting and downlights. With a miniature cutout, white frame and transparent glass it is a great addition to low lit environments such as theatre rooms, hotel lobbies and bars. Available in a range of colour temperatures and dimming options while utilising a Bridgelux COB LED. Mains dimming as standard with optional DALI-2 and Bluetooth dimming. Fleur-F35 offers a 5 year warranty.

Standard

IP 44 CRI (Ra) >90 3-Step
MAINS DIM
WARRANTY 5YR

Optionals

Bluetooth

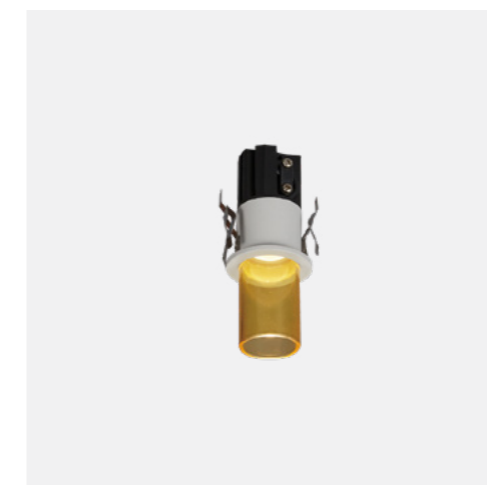

Fleur-F35

Finish Option: White


Glass Finish: Amber Smoke Grey

CCT: 3000K 4000K

Wattage: 5W (System 7W)

Beam: 30°

Ceiling cut-out Ø35mm / 6-25mm ceiling thickness



Hera-F Series

3W-18W Fixed LED Recessed Downlight

The Hera-F Series is a fixed, deep set LED luminaire providing low-glare light distribution in different beam options and baffle finishes. Made of high quality materials including a die cast aluminium housing and a high purity optical lens, Hera has been designed to be easy to maintain, adaptable and efficient.

Purpose built for a range of residential, commercial and hospitality applications, Hera-F Series integrates Zhaga compliant Bridgelux LED technology and a mains dimmable driver as standard with optional DALI-2 or Bluetooth dimming. Hera offers a 5 year warranty.

Standard

IP 44 CRI (Ra) >90 3-Step
 MAINS DIM UGR <19
 CE WARRANTY 5YR

Optionals

Bluetooth DALI



Hera-F40

Finish Options: White Black


Baffle Colour: White Black Gold
 Specular

CCT: 2700K 3000K 4000K

Wattage: 3W (System 5W)

Beam: 10° | 15° | 24°

Ceiling cut-out Ø40mm / 6-25mm ceiling thickness



Hera-F55

Finish Options: White Black


Baffle Colour: White Black Gold
 Specular

CCT: 2700K 3000K 4000K

Wattage: 7W (System 9W)

Beam: 15° | 24° | 36°

Ceiling cut-out Ø55mm / 6-25mm ceiling thickness



Hera-F65

Finish Options: White Black


Baffle Colour: White Black Gold
 Specular

CCT: 2700K 3000K 4000K

Wattage: 9W (System 11W)

Beam: 15° | 24° | 36°

Ceiling cut-out Ø65mm / 6-25mm ceiling thickness



Hera-F75

Finish Options: White Black


Baffle Colour: White Black Gold
 Specular

CCT: 2700K 3000K 4000K

Wattage: 13W (System 15W)

Beam: 15° | 24° | 36°

Ceiling cut-out Ø75mm / 6-25mm ceiling thickness



Hera-F85

Finish Options: White Black


Baffle Colour: White Black Gold
 Specular

CCT: 2700K 3000K 4000K

Wattage: 18W (System 20W)

Beam: 15° | 24° | 36°

Ceiling cut-out Ø85mm / 6-25mm ceiling thickness



Hera-W Series

7W-13W Fixed LED Recessed Wall Washer Downlight

The Hera-W Series is a fixed, deep set, wall wash LED luminaire providing low-glare wall washing with different beam options and baffle finishes. Made of high quality materials including a die cast aluminium housing and a high purity optical lens, Hera has been designed to be easy to maintain, adaptable and efficient.

The Hera-W Series is purpose built for a range of residential, commercial and hospitality applications. Hera-W integrates Zhaga compliant Bridgelux LED technology, mains dimmable LED with optional DALI and Bluetooth dimming options. Hera-W comes with a 5 year warranty.

Standard

- IP 44 CRI (Ra) >90 3-Step
- MAINS DIM UGR <19
- WALL WASHER
- WARRANTY 5YR

Optionals

- Bluetooth



Hera-W65

Finish Options: White Black


Baffle Colour: White Black Gold
 Specular

CCT: 2700K 3000K 4000K

Wattage: 7W (System 9W)

Beam: 15° | 24° | 36°

Ceiling cut-out Ø65mm / 6-25mm ceiling thickness



Hera-W75

Finish Options: White Black


Baffle Colour: White Black Gold
 Specular

CCT: 2700K 3000K 4000K

Wattage: 9W (System 11W)

Beam: 15° | 24° | 36°

Ceiling cut-out Ø75mm / 6-25mm ceiling thickness



Hera-F85

Finish Options: White Black


Baffle Colour: White Black Gold
 Specular

CCT: 2700K 3000K 4000K

Wattage: 13W (System 15W)

Beam: 15° | 24° | 36°

Ceiling cut-out Ø85mm / 6-25mm ceiling thickness



Kuppel-F Series

7.5W-52W Fixed Round LED Recessed Downlight

Recessed LED architectural luminaire series providing optimised and efficient performance with an IP54 rating and deep-set lamp source for symmetrical low glare distribution. Available in a range of wattage/lumen packages, the Kuppel-F Series also offers various dimming options with screw adjustable wing mounting for easy installation.

Made from a die-cast aluminium housing with an aluminium reflector, it is available in a variety of finishes. Integrating Zhaga compliant Citizen LED technology and coupled with Tridonic control gear, the Kuppel-F Series offers a 5 year warranty

Standard

IP 54
UGR <15 | <19
3-Step

CRI (Ra) >90
Z
CE
⚡

WARRANTY 5YR

Optionals

Bluetooth
Tridonic



Kuppel-F75

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 7.5W (System 9W) | 11W (System 13W)

Beam: 25° | 50°

Ceiling cut-out Ø75mm / 6-25mm ceiling thickness



Kuppel-F150

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 18W (System 21W) | 25W (System 28W)

Beam: 30° | 60°

Ceiling cut-out Ø150mm / 6-25mm ceiling thickness



Kuppel-F100

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 9W (System 11W) | 13W (System 15W)

Beam: 30° | 50°

Ceiling cut-out Ø110mm / 6-25mm ceiling thickness



Kuppel-F200

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 25W (System 28W) | 38W (System 42W)
52W (System 56W)

Beam: 18° | 30° | 60°

Ceiling cut-out Ø200mm / 6-25mm ceiling thickness

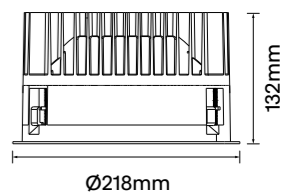

Kuppel-FS Series

7.5W-38W Fixed Square LED Recessed Downlight

Recessed LED architectural luminaire series providing optimised and efficient performance with an IP54 rating and deep-set lamp source for symmetrical low glare distribution. Available in a range of wattage/lumen packages, the Kuppel-FS Series also offers various dimming options with screw adjustable wing mounting for easy installation.

Made from a die-cast aluminium housing with an aluminium reflector, it is available in a variety of finishes. Integrating Zhaga compliant Citizen LED technology and coupled with Tridonic control gear, the Kuppel-FS Series offers a 5 year warranty.

Standard

IP 54
UGR <15 | <19
3-Step

CRI (Ra) >90
Z
CE
⚠

WARRANTY 5YR

Optionals

Bluetooth
ball



Kuppel-F68S

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 7.5W (System 9W) | 11W (System 13W)

Beam: 25° | 60°

Ceiling cut-out 68x68mm / 6-25mm ceiling thickness



Kuppel-F100S

Finish Options: White Black



Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 9W (System 11W) | 13W (System 15W)

Beam: 60°

Ceiling cut-out 100x100mm / 6-25mm ceiling thickness

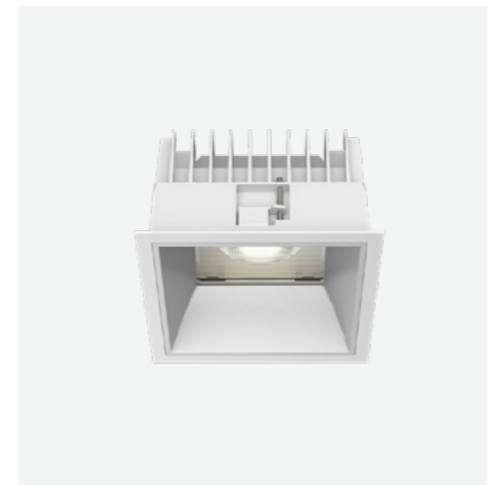

Kuppel-F150S

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 18W (System 21W) | 25W (System 28W)

Beam: 70°

Ceiling cut-out 150x150mm / 6-25mm ceiling thickness



Kuppel-F200S

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 25W (System 28W) | 38W (System 42W)

Beam: 70°

Ceiling cut-out 200x200mm / 6-25mm ceiling thickness

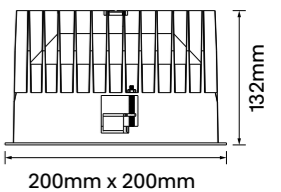

Linie-F Series

2W-22W Fixed Linear Recessed Downlight

Fixed recessed LED architectural downlight series provides symmetrical, low-glare light distribution within a compact, linear housing. Available in multiple baffle finished to suit a wide variety of applications. Minimal trim for a seamless look.



Comes quality constructed using a die-cast aluminium structure with high grade polycarbonate secondary baffle optics. Integrating OSRAM LED technology with industry leading control gear, the Linie-F Series comes with a 5 year warranty.

Standard

IP 44 UGR <19 3-Step
CRI (Ra) >90 Z CE △
Recessed WARRANTY 5YR

Optionals

Bluetooth ball

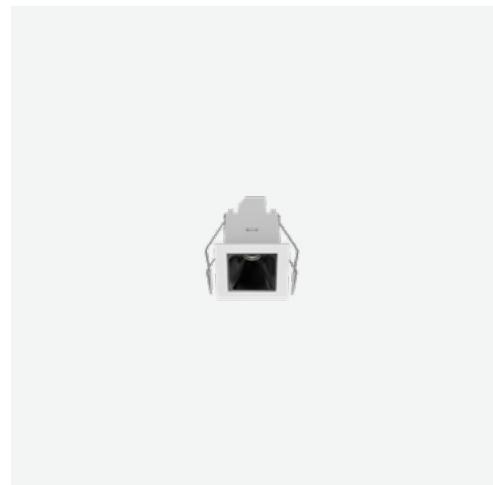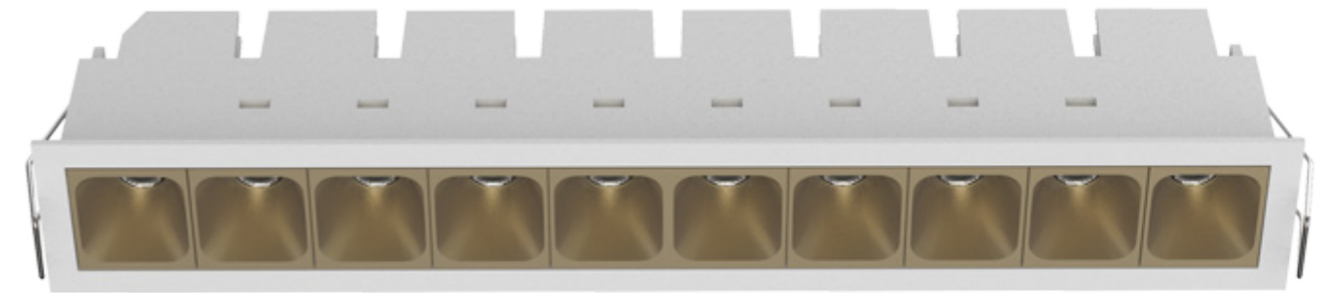

Linie-F1C

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver

CCT: 3000K 4000K

Wattage: 2W (System 3W)

Beam: 24° | 40°

Ceiling cut-out W37xL37mm / 6-25mm ceiling thickness

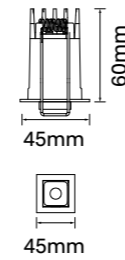

Linie-F4C

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver

CCT: 3000K 4000K

Wattage: 9W (System 11W)

Beam: 24° | 40°

Ceiling cut-out W65xL65mm / 6-25mm ceiling thickness

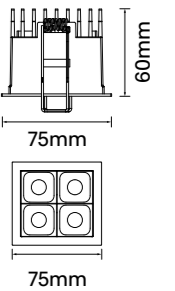

Linie-F2C

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver

CCT: 3000K 4000K

Wattage: 4W (System 6W)

Beam: 24° | 40°

Ceiling cut-out W37xL62mm / 6-25mm ceiling thickness

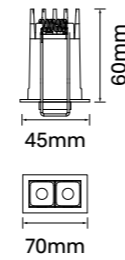

Linie-F5C

Finish Options: White Black



Baffle Colour: White Black Gold
 Silver

CCT: 3000K 4000K

Wattage: 11W (System 13W)

Beam: 24° | 40°

Ceiling cut-out W37xL144mm / 6-25mm ceiling thickness

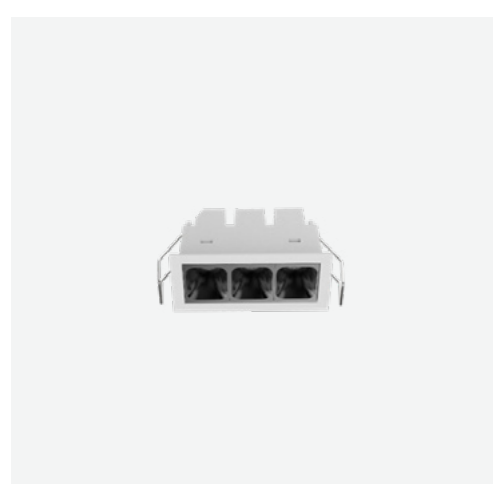

Linie-F3C

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver

CCT: 3000K 4000K

Wattage: 7W (System 9W)

Beam: 24° | 40°

Ceiling cut-out W37xL90mm / 6-25mm ceiling thickness

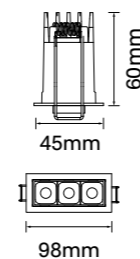

Linie-F10C

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver

CCT: 3000K 4000K

Wattage: 22W (System 24W)

Beam: 24° | 40°

Ceiling cut-out W37xL282mm / 6-25mm ceiling thickness

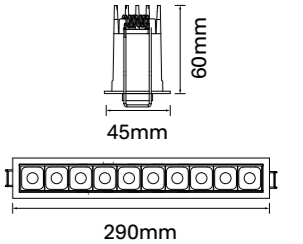

Linie-IP Series

4W-22W Fixed IP Rated Linear Recessed Downlight

Fixed IP65 rated recessed LED architectural downlight series provides symmetrical, low-glare light distribution within a compact, linear housing. Designed as an exterior fitting and available in multiple baffle finishes the Linie-IP is suitable for a range of environments and applications.

Features a quality constructed die-cast aluminium structure and glass lens. Integrating OSRAM LED technology with industry leading control gear, the Linie-IP Series comes with a 5 year warranty.

Standard

IP 65 UGR <19 3-Step
CRI (Ra) >90 CE RoHS
Recessed WARRANTY 5YR

Optionals

Bluetooth Ball



Linie-IP-F2C

Finish Options: White Black



Baffle Colour: White Black Gold
 Silver

CCT: 3000K 4000K

Wattage: 4W (System 6W)

Beam: 24° | 40°

Ceiling cut-out W37xL62mm / 6-25mm ceiling thickness



Linie-IP-F5C

Finish Options: White Black



Baffle Colour: White Black Gold
 Silver

CCT: 3000K 4000K

Wattage: 11W (System 13W)

Beam: 24° | 40°

Ceiling cut-out W37xL144mm / 6-25mm ceiling thickness



Linie-IP-F3C

Finish Options: White Black



Baffle Colour: White Black Gold
 Silver

CCT: 3000K 4000K

Wattage: 7W (System 9W)

Beam: 24° | 40°

Ceiling cut-out W37xL90mm / 6-25mm ceiling thickness



Linie-IP-F10C

Finish Options: White Black



Baffle Colour: White Black Gold
 Silver


CCT: 3000K 4000K

Wattage: 22W (System 24W)

Beam: 24° | 40°

Ceiling cut-out W37 x L282mm / 6-25mm ceiling thickness

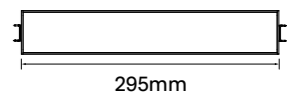

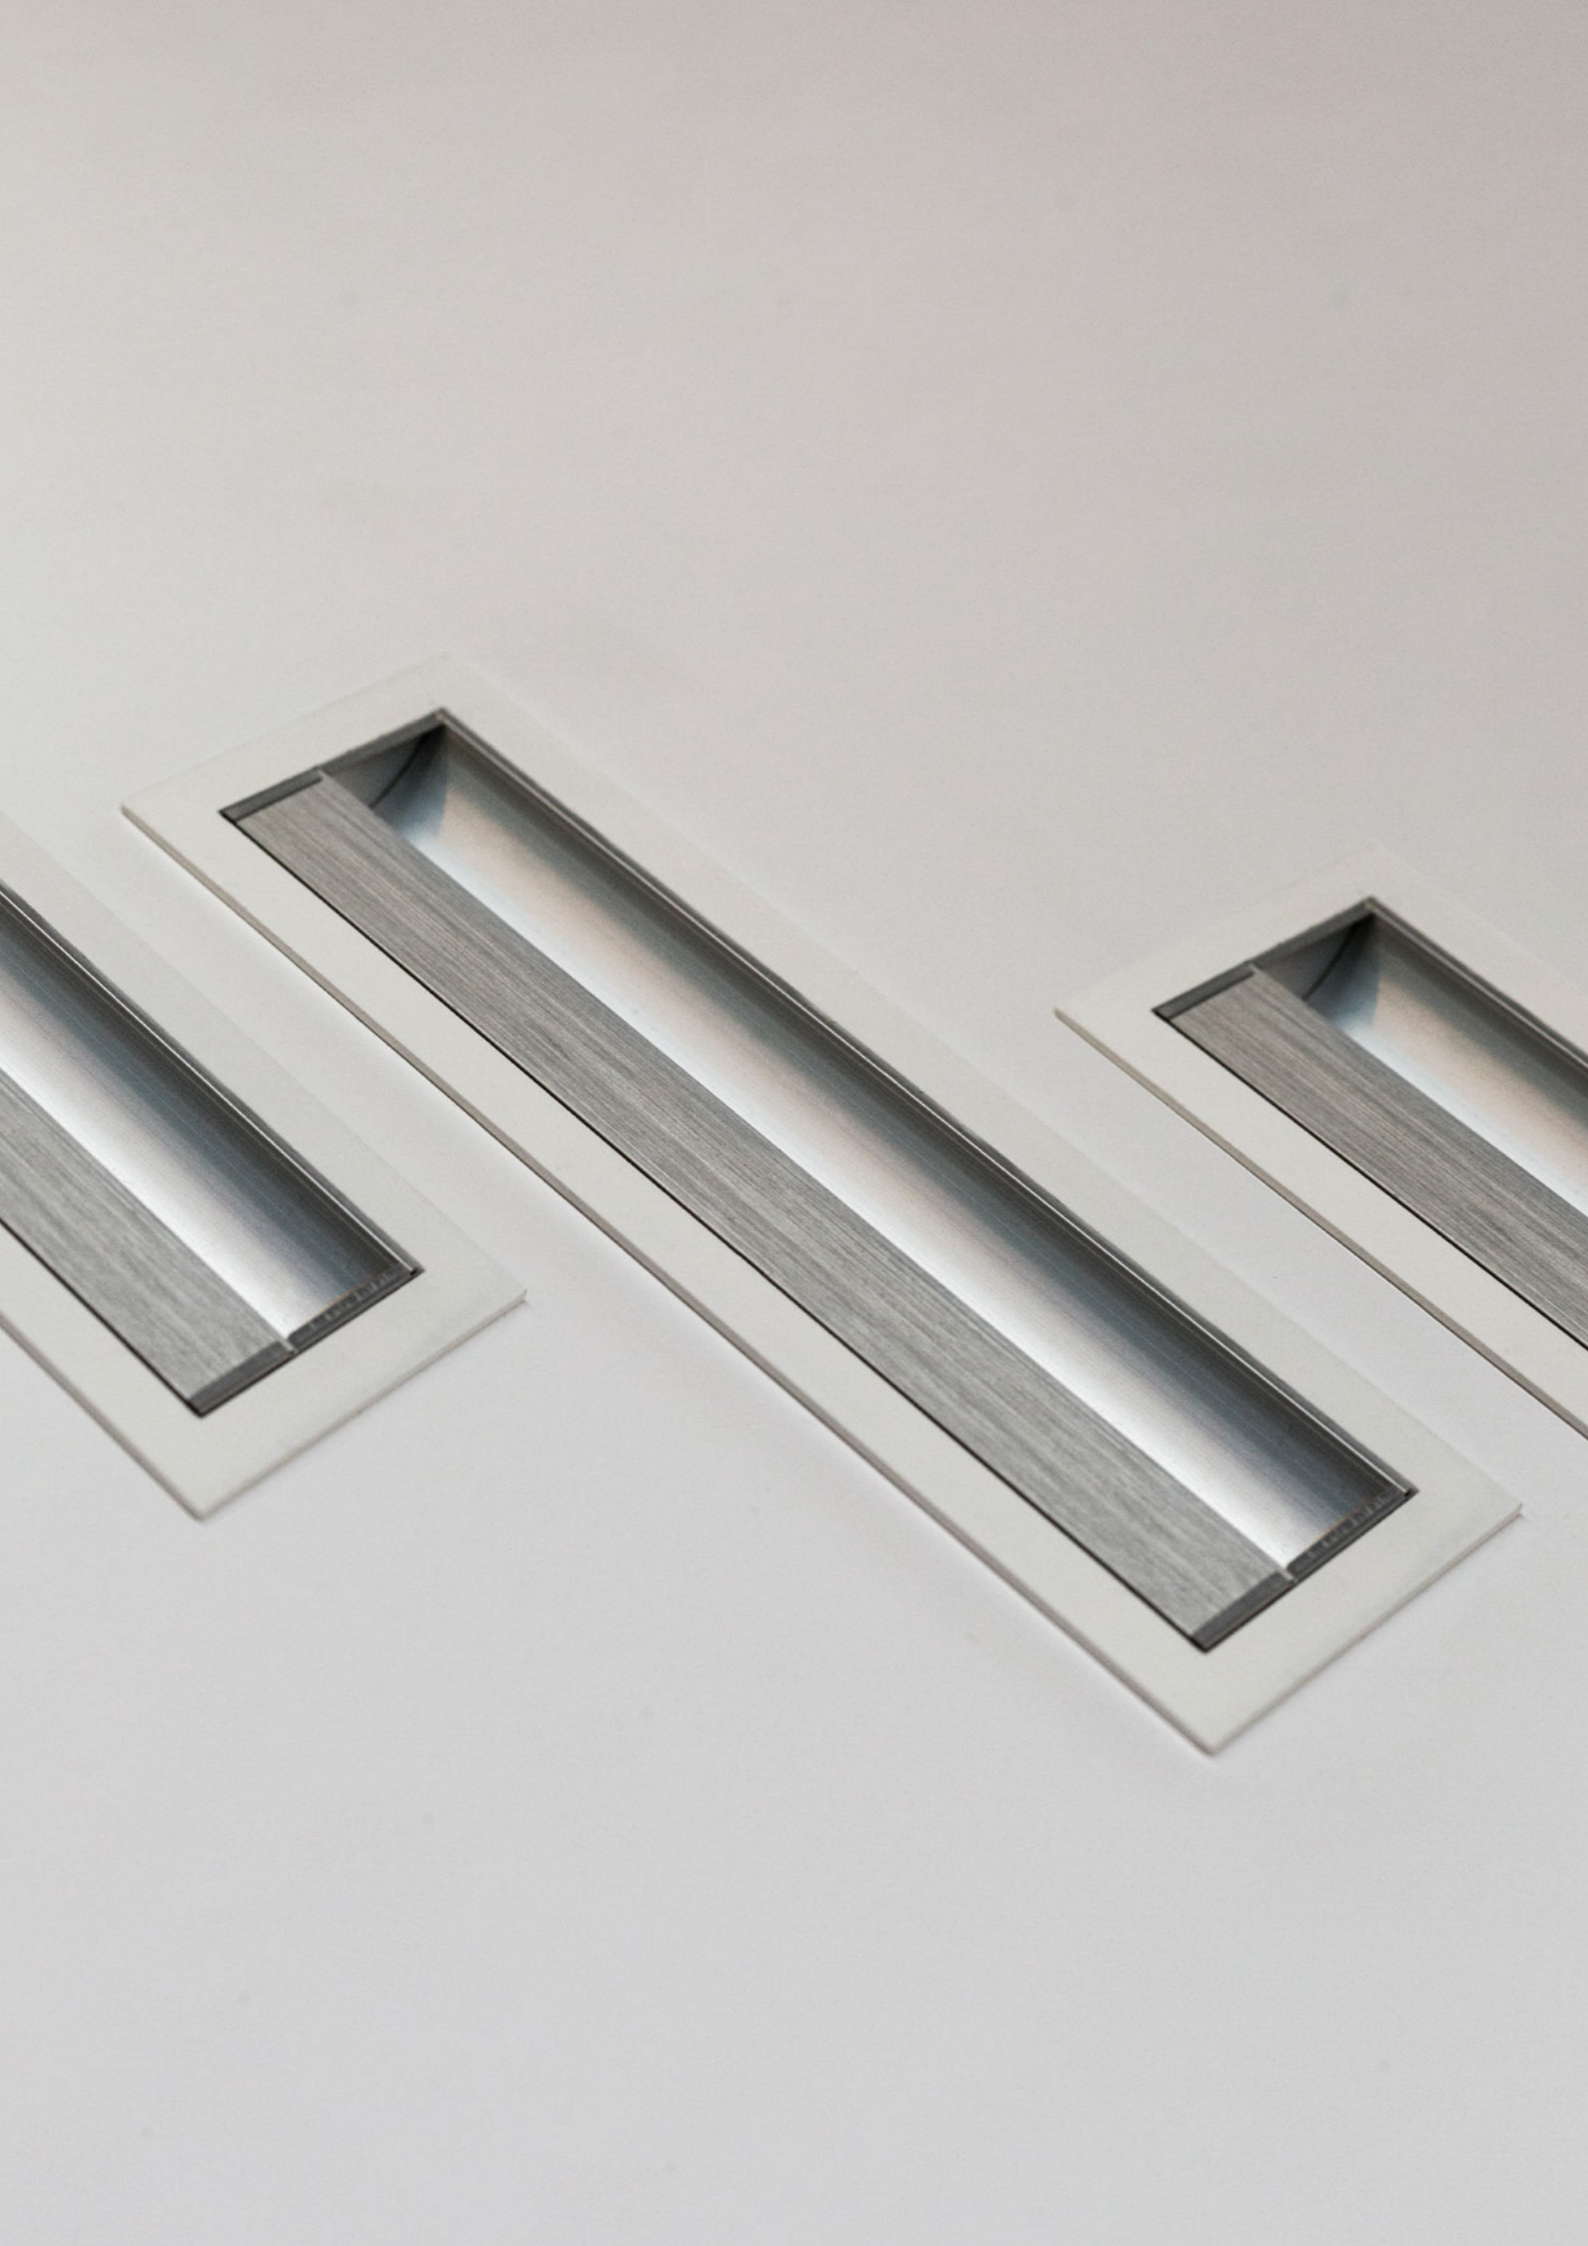


Linie-W Series

11W-22W Fixed Linear Wall Washer Recessed Downlight


Fixed recessed LED architectural wall washer series provides asymmetrical distribution with advanced optics in a compact, linear housing. Available in a trim or trimless option for a seamless look.

Quality constructed from a die-cast aluminium structure with a high grade extruded aluminium baffle. Integrating OSRAM LED technology with a TRIDONIC control gear, the Linie-W Series offers a 5 year warranty.

Standard



Optionals

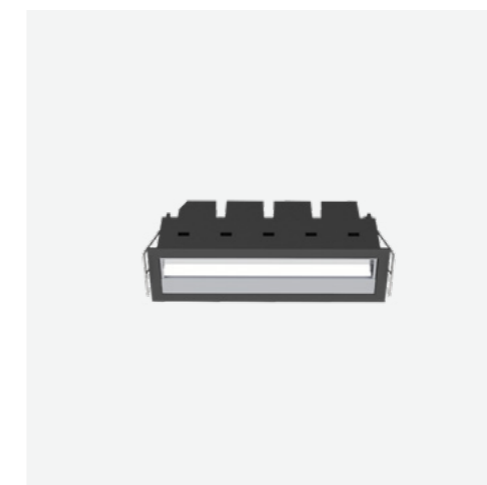

Linie-W5

Finish Options: White Black



Baffle Colour: Natural Anodised (NA)

CCT: 3000K 4000K

Wattage: 11W (System 13W)

Beam: Asymmetrical

Ceiling cut-out W37xL144mm / 6-25mm ceiling thickness



Linie-W10

Finish Options: White Black



Baffle Colour: Natural Anodised (NA)

CCT: 3000K 4000K

Wattage: 22W (System 24W)

Beam: Asymmetrical

Ceiling cut-out W37xL282mm / 6-25mm ceiling thickness

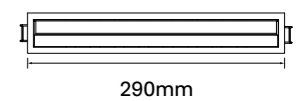



Morq-A Series

6W-10W Adjustable Semi Recessed Downlight


Morq-A Series is an LED semi-recessed architectural luminaire providing symmetrical, low-glare illumination. Quality manufactured and Italian designed, the semi-recessed downlight offers optimised and efficient performance. In either a classic white or solid black exterior with black baffle it suits a variety of residential and architectural applications.

Quality die-cast constructed with optical grade internal reflector for precise illumination, the Morq-A Series uses Zhaga compliant Citizen LED technology with a control gear from industry leading Tridonic. The fitting provides various dimming options including DALI-2 and Bluetooth wireless dimming and comes with a 5 year warranty.

Standard



Optionals

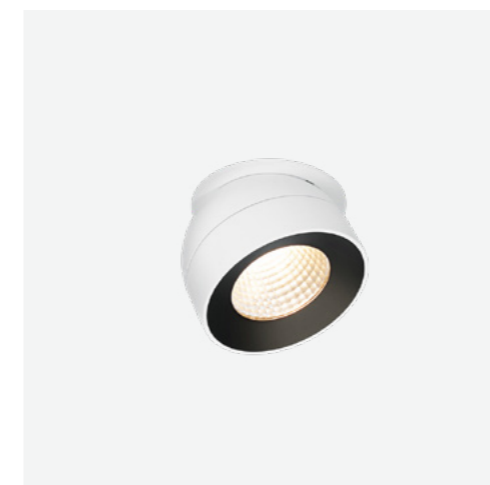

Morq-A73

Finish Options: White Black


Baffle Colour: Black

CCT: 3000K 4000K

Wattage: 6W (System 8W)

Beam: 20° | 38°

Ceiling cut-out Ø73mm / 6-25mm ceiling thickness



Morq-A90

Finish Options: White Black


Baffle Colour: Black

CCT: 3000K 4000K

Wattage: 10W (System 13W)

Beam: 30°

Ceiling cut-out Ø90mm / 6-25mm ceiling thickness






Nebula-F75 Series

18W-29W Fixed LED Recessed Downlight


Nebula-F75 Series is a high performance, fixed recessed LED architectural luminaire providing high illuminance and low-glare light distribution. Available in a range of wattages with a high lumen output, the Nebula fixed LED downlight is high quality, versatile and efficient. With its small physical footprint the Nebula blends into the ceiling and surrounds while providing exceptional illumination for a variety of spaces. Comes in a range of colour temperatures, beam angles and dimming options to suit different project requirements.

Additional options include a linear spreader lens, glass cover and honeycomb louvre. Integrating Zhaga compliant Bridgelux LED technology with a Tridonic control gear, Nebula-F75 comes with a 5 year warranty.

Standard



Optionals

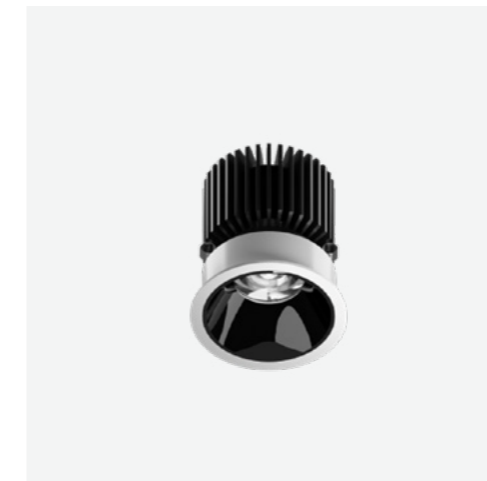

Nebula-F75-18W

Finish Options: White Black


Baffle Colour: Black

CCT: 3000K 4000K

Wattage: 18W (System 20W)

Beam: 15° | 32° | 42°

Ceiling cut-out Ø75mm / 6-25mm ceiling thickness

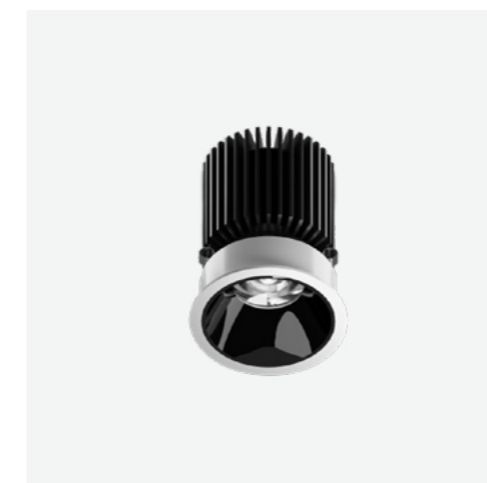

Nebula-F75-22W

Finish Options: White Black


Baffle Colour: Black

CCT: 3000K 4000K

Wattage: 22W (System 25W)

Beam: 15° | 32° | 42°

Ceiling cut-out Ø75mm / 6-25mm ceiling thickness

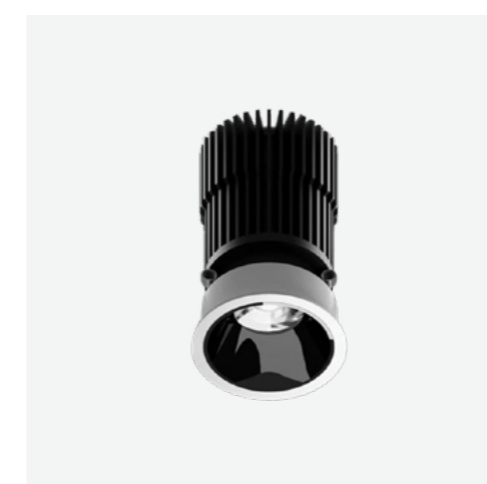

Nebula-F75-29W

Finish Options: White Black


Baffle Colour: Black

CCT: 3000K 4000K

Wattage: 29W (System 35W)

Beam: 19° | 29° | 38°

Ceiling cut-out Ø75mm / 6-25mm ceiling thickness



Pandora-F Series

9W-16W Fixed LED Recessed Downlight

Pandora is a decorative, recessed downlight with a frosted, glowing trim that protrudes below the ceiling line.

The decorative luminaire series provides symmetrical, low-glare distribution with quality componentry and an intriguing design. The downlight offers efficient performance and IP44 protection, making it suitable for a range of applications.

Available in a range of colour temperatures, wattage / lumen packages and varied dimming options such as mains dimming, DALI-2 and Bluetooth dimming on request. Quality die-cast aluminium heat sink and PMMA frosted fascia trims. The Pandora-F Series of luminaires integrates Zhaga compliant Bridgelux LED technology and comes with a 5 year warranty.

Standard


IP 44
CRI (Ra) >90
UGR <19

3-Step
MAINS DIM
Z

CE
WARRANTY 5YR

Optionals

Bluetooth
Trali

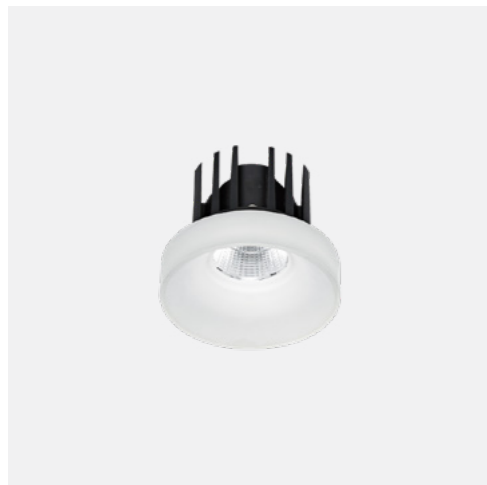

Pandora-FS55

Finish Option: Sand White



Glass Finish: Frosted

CCT: 3000K 4000K

Wattage: 9W (System 11W)

Beam: 35°

Ceiling cut-out Ø55mm / 6-25mm ceiling thickness

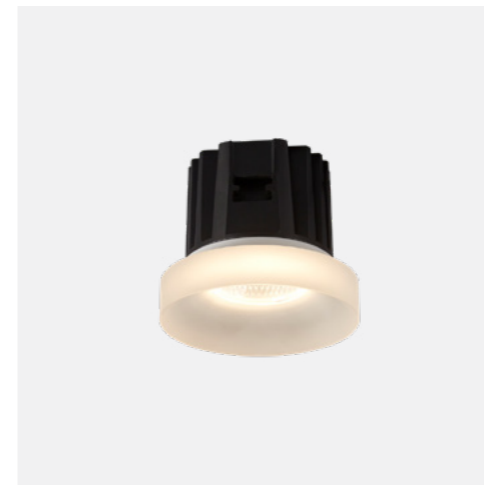

Pandora-FS70

Finish Option: Sand White


Glass Finish: Frosted

CCT: 3000K 4000K

Wattage: 16W (System 18W)

Beam: 35°

Ceiling cut-out Ø70mm / 6-25mm ceiling thickness



Pandora-FL55

Finish Option: Sand White


Glass Finish: Frosted

CCT: 3000K 4000K

Wattage: 9W (System 11W)

Beam: 35°

Ceiling cut-out Ø55mm / 6-25mm ceiling thickness



Pandora-FL70

Finish Option: Sand White


Glass Finish: Frosted

CCT: 3000K 4000K

Wattage: 16W (System 18W)

Beam: 35°

Ceiling cut-out Ø70mm / 6-25mm ceiling thickness



Peeper-F Series

3W-16W Fixed LED Recessed Downlight

Peeper-F Series is a Decorative, LED, ceiling recessed luminaire providing symmetrical light distribution in a quality constructed fitting. With a minimal design in either black or white and a distinct optical lens, it is a unique fitting suited to a wide range of applications.

Peeper-F Series features a Zhaga compliant LED from Bridgelux and comes in a wide range of colour temperatures and dimming options from Mains dimming through to DALI-2 and Bluetooth. The Peeper-F Series comes with a 5 year warranty.

Standard

IP 44
UGR <19
3-Step


CRI (Ra) >90
Z
CE
△

MAINS DIM
WARRANTY 5YR

MAINS DIM
VOLTAGE 24V/48V

Optionals

Bluetooth
DALI

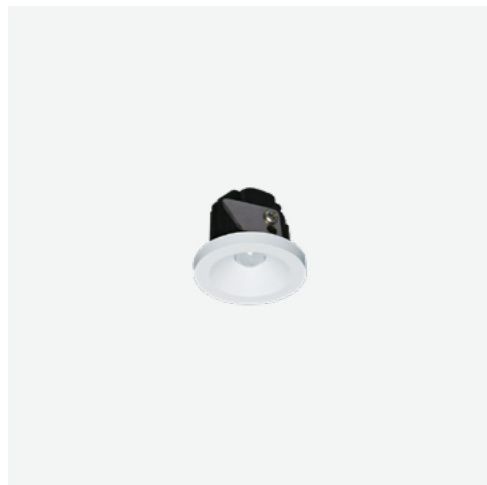

Peeper-F33


Finish Options: White Black

CCT: 3000K 4000K

Wattage: 3W (System)

Beam: 38°

Ceiling cut-out Ø33mm / 6-25mm ceiling thickness



Peeper-F75


Finish Options: White Black

CCT: 3000K 4000K

Wattage: 11W (System 13W)

Beam: 24°

Ceiling cut-out Ø75mm / 6-25mm ceiling thickness



Peeper-F60


Finish Options: White Black

CCT: 3000K 4000K

Wattage: 6W (System 7W)

Beam: 24°

Ceiling cut-out Ø60mm / 6-25mm ceiling thickness



Peeper-F90


Finish Options: White Black

CCT: 3000K 4000K

Wattage: 16W (System 18W)

Beam: 20°

Ceiling cut-out Ø90mm / 6-25mm ceiling thickness





Point-F35

3W Fixed Mini LED Recessed Downlight

Mini recessed LED architectural luminaire series providing low-glare illumination with a deep-set light source. The Point is a simple and minimal luminaire designed to accentuate features with a tight spot light effect. Applications include corridors, cabinets, kitchens or niches where a discrete luminaire is required.

Offered in a multitude of colours to suit almost any décor and manufactured from machined aluminium while utilising an industry leading Osram SMD LED. The Point-F35 offers a 5 year warranty.

Standard

IP 20 UGR <19 3-Step
CRI (Ra) >90 CE
WARRANTY 5YR

Optionals

Bluetooth



Point-F35

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver Red Custom

CCT: 2700K 3000K 4000K

Wattage: 3W (System 3.3W)

Beam: 20°

Ceiling cut-out Ø35mm / 6-25mm ceiling thickness





Polkadot-F Series

1.5W-6W Fixed Mini LED Recessed Downlight

Minimal micro recessed LED architectural luminaire series providing ultra-low-glare and visual comfort with its deep set light source. Even and smooth illuminance with a range of optical distributions and wattages to suit different applications from accent lighting to spot lighting of an object.

The Polkadot works equally well in hotel applications where a minimal and simple look is required. Interchangeable internal reflectors and exterior frame colours enable the Polkadot to blend in with its surrounds or stand out as a statement piece.


Polkadot-F Series also offers a range of dimming options and is made from a die-cast aluminium housing, aluminium reflector and high-grade polycarbonate secondary reflectors. Integrating world leading brands such as and Citizen LED technology, the Polkadot comes with a 5 year warranty.

Standard

IP 44 UGR <19 3-Step
 CRI (Ra) >83
WARRANTY 5YR

Optionals

Bluetooth

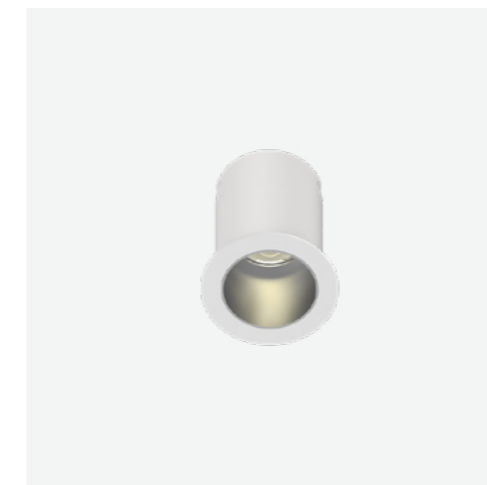

Polkadot-F35

Finish Options: White Black

Baffle Colour: White Black Gold
 Silver Custom

CCT: 3000K 4000K

Wattage: 1.5W (System 2.5W)

Beam: 18° | 30°

Ceiling cut-out Ø35mm / 6-25mm ceiling thickness



Polkadot-F45

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver Custom

CCT: 3000K 4000K

Wattage: 6W (System 8W)

Beam: 30°

Ceiling cut-out Ø45mm / 6-25mm ceiling thickness



Recco-A Series

4W-38W Adjustable Round LED Recessed Downlight

Adjustable recessed LED architectural luminaire series providing low-glare light distribution with a unique mechanism for uniform and precise angle adjustment and spring-load push-back for easy installation. Offering optimised and efficient performance with a vast range of cut-out and wattage/lumen packages. It is available in a range of colour temperatures, beam angles and secondary reflector finishes to suit a multitude of applications.

Recco-A Series offers various dimming options and an additional anti-glare honeycomb reflector accessory. The fitting is made from a die-cast aluminium housing with high purity aluminium primary reflector and high-grade polycarbonate secondary reflector. Integrating Zhaga compliant Cree LED technology with Tridonic control gear, the Recco-A Series offers a 5 year warranty.

Standard



Optionals



Recco-A45

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 4W (System 6W)

Beam: 18° | 24° | 35° | 50°

Ceiling cut-out Ø45mm / 6-25mm ceiling thickness



Recco-A68

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 7.5W (System 9W) | 11W (System 13W)

Beam: 24° | 40° | 55°

Ceiling cut-out Ø68mm / 6-25mm ceiling thickness



Recco-A100

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 13W (System 15W) | 18W (System 21W)

Beam: 20° | 40° | 50°

Ceiling cut-out Ø100mm / 6-25mm ceiling thickness



Recco-A125

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 18W (System 21W) | 25W (System 28W)

Beam: 20° | 40° | 50°

Ceiling cut-out Ø125mm / 6-25mm ceiling thickness



Recco-A150

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 25W (System 28W) | 38W (System 42W)

Beam: 20° | 35° | 50°

Ceiling cut-out Ø150mm / 6-25mm ceiling thickness

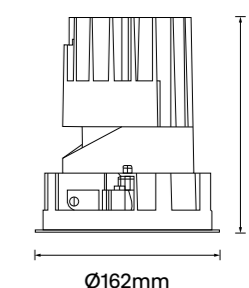

Recco-AS Series

4W-38W Adjustable Square LED Recessed Downlight

Adjustable recessed LED architectural luminaire series providing low-glare light distribution with a unique mechanism for uniform and precise angle adjustment and spring-load pushback for easy installation. Offering optimised and efficient performance with a vast range of cut-out and wattage/lumen packages. It is available in a range of colour temperatures, beam angles and secondary reflector finishes to suit a multitude of applications.

Recco-AS series offers various dimming options and an additional anti-glare honeycomb reflector accessory. The fitting is made from a die-cast aluminium housing with high purity aluminium primary reflector and high-grade polycarbonate secondary reflector. Integrating Zhaga compliant Citizen LED technology with Tridonic control gear, the Recco-AS series offers a 5 year warranty.

Standard

IP 20 UGR <19 3-Step
CRI (Ra) >90 355° 30°
COI ON REQUEST CE RoHS
WARRANTY 5YR

Optionals

Bluetooth DALI



Recco-A455

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 4W (System 6W)

Beam: 18° | 24° | 35° | 50°

Ceiling cut-out 45mmx45mm / 6-25mm ceiling thickness



55mm x 55mm



Recco-A685

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K


Wattage: 7.5W (System 9W) | 11W (System 13W)

Beam: 24° | 40° | 55°

Ceiling cut-out 68mmx68mm / 6-25mm ceiling thickness



78mm x 78mm

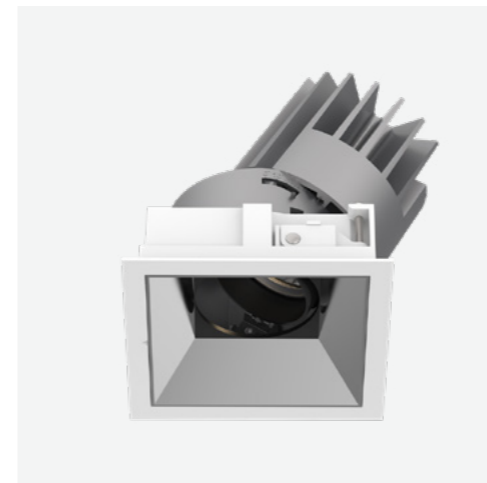

Recco-A1255

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 18W (System 21W) | 25W (System 28W)

Beam: 20° | 40° | 50°

Ceiling cut-out 122mmx122mm / 6-25mm ceiling thickness



134mm x 134mm



Recco-A1005

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 13W (System 15W) | 18W (System 21W)

Beam: 20° | 40° | 50°

Ceiling cut-out 96mmx96mm / 6-25mm ceiling thickness



107mm x 107mm



Recco-A1505

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 25W (System 28W) | 38W (System 42W)

Beam: 20° | 35° | 50°

Ceiling cut-out 147mmx147mm / 6-25mm ceiling thickness



159mm x 159mm



Recco-F Series

13W-38W Fixed Round LED Recessed Downlight

A fixed recessed LED architectural luminaire series providing low-glare light distribution. The Recco-F offers optimised and efficient performance in a vast range of cut-out and wattage/ lumen packages. Available in a range of colour temperatures, beam angles, secondary reflector finishes, dimming options, an anti-glare honeycomb reflector and trimless mounting kit.

Constructed from a die-cast aluminium, and a spring-loaded push back arm for easy installation. The Recco-F Series integrates Zhaga compliant Citizen LED technology with Tridonic control gear and comes with a 5 year warranty.

Standard



Optionals



Recco-F100

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 13W (System 15W) | 18W (System 21W)

Beam: 28° | 35° | 50°

Ceiling cut-out Ø100mm / 6-25mm ceiling thickness



Recco-F125

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 18W (System 21W) | 25W (System 28W)

Beam: 28° | 40° | 50°

Ceiling cut-out Ø125mm / 6-25mm ceiling thickness



Recco-F150

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 25W (System 28W) | 38W (System 42W)

Beam: 28° | 32° | 50°

Ceiling cut-out Ø150mm / 6-25mm ceiling thickness

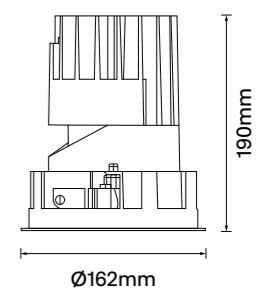



Recco-FS Series

13W-38W Fixed Square LED Recessed Downlight

A fixed recessed LED architectural luminaire series providing low-glare light distribution. The Recco-FS offers optimised and efficient performance in a vast range of cut-out and wattage/ lumen packages. Available in a range of colour temperatures, beam angles, secondary reflector finishes, dimming options, an anti-glare honeycomb reflector and trimless mounting kit.

Constructed from a die-cast aluminium, and a spring-loaded push back arm for easy installation. The Recco-FS Series integrates Zhaga compliant Citizen LED technology with Tridonic control gear and comes with a 5 year warranty.

Standard



Optionals



Recco-A100S

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 13W (System 15W) | 18W (System 21W)

Beam: 28° | 35° | 50°

Ceiling cut-out 96mmx96mm / 6-25mm ceiling thickness



Recco-A125S

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 18W (System 21W) | 25W (System 28W)

Beam: 28° | 40° | 50°

Ceiling cut-out 122mmx122mm / 6-25mm ceiling thickness



Recco-A150S

Finish Options: White Black


Baffle Colour: White Black Matt Specular
 Gold Black Chrome

CCT: 3000K 4000K

Wattage: 25W (System 28W) | 38W (System 42W)

Beam: 28° | 32° | 50°

Ceiling cut-out 147mmx147mm / 6-25mm ceiling thickness

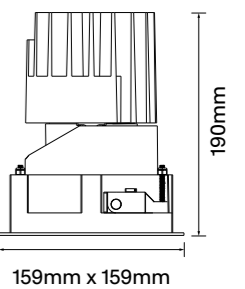



Recco-W Series

13W-38W Fixed Round LED Wall Washer Downlight

A fixed recessed LED architectural wall washer series providing asymmetric distribution. The Recco-W offers optimised and efficient performance in a range of cut-outs and wattage/lumen packages. Available in a range of colour temperatures, beam angles, secondary reflector finishes and dimming options.

Constructed from a die-cast aluminium and high-grade polycarbonate secondary reflector. The series integrates Zhaga compliant Citizen LED technology with Tridonic control gear and comes with a 5 year warranty.

Standard

IP 20 UGR <19 3-Step

CRI (Ra) >90 COI ON REQUEST

WALL WASHER CE

WARRANTY 5YR

Optionals

Bluetooth



Recco-W100

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 13W (System 15W) | 18W (System 21W)

Beam: Asymmetrical

Ceiling cut-out Ø100mm / 6-25mm ceiling thickness



Recco-W125

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 18W (System 21W) | 25W (System 28W)

Beam: Asymmetrical

Ceiling cut-out Ø125mm / 6-25mm ceiling thickness



Recco-W150

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 25W (System 28W) | 38W (System 42W)

Beam: Asymmetrical

Ceiling cut-out Ø150mm / 6-25mm ceiling thickness

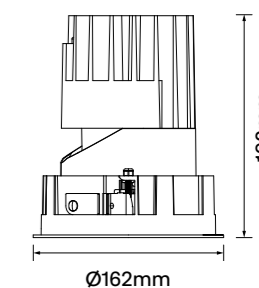

Recco-WS Series

13W-38W Fixed Square LED Recessed Downlight

A fixed recessed LED architectural wall washer series providing asymmetric distribution. The Recco-WS offers optimised and efficient performance in a range of cut-outs and wattage/lumen packages. Available in a range of colour temperatures, beam angles, secondary reflector finishes and dimming options.

Constructed from a die-cast aluminium and high-grade polycarbonate secondary reflector. The series integrates Zhaga compliant Citizen LED technology with Tridonic control gear and comes with a 5 year warranty.

Standard

IP 20 UGR <19 3-Step

CRI (Ra) >90 COI ON REQUEST

WALL WASHER CE

WARRANTY 5YR

Optionals

Bluetooth



Recco-A100S

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 13W (System 15W) | 18W (System 21W)

Beam: Asymmetrical

Ceiling cut-out 96mmx96mm / 6-25mm ceiling thickness



Recco-A125S

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 18W (System 21W) | 25W (System 28W)

Beam: Asymmetrical

Ceiling cut-out 122mmx122mm / 6-25mm ceiling thickness



Recco-A150S

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 25W (System 28W) | 38W (System 42W)

Beam: Asymmetrical

Ceiling cut-out 147mmx147mm / 6-25mm ceiling thickness

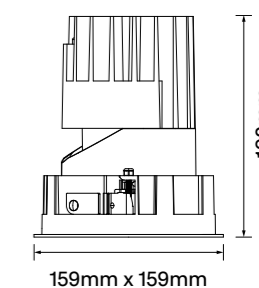



Smooth Series

10W-12W Adjustable / Fixed / Trimless Recessed Downlight

LED ceiling recessed luminaire providing symmetrical, low-glare light distribution. Smooth Series downlight offers optimised performance with a high colour rendering index as standard in a minimal designed housing. The Smooth Series is high powered and compact, suitable for a range of applications including residential and commercial spaces. A deep-set lamp source ensures optimal glare free performance across a variety of general indoor applications.

Smooth utilises Zhaga compliant CREE COB technology. With a standard mains dimmable LED driver with a selection of DALI-2 and Bluetooth (Casambi) dimming options on request. Smooth Series offers a 5 year warranty.

Standard



Optionals



Smooth-A75


Finish Options: White Black

CCT: 3000K 4000K

Wattage: 10W (System 12W) | 12W (System 14W)

Beam: 40° | 60°

Ceiling cut-out Ø75mm / 6-25mm ceiling thickness



Smooth-F70


Finish Options: White Black Custom

CCT: 3000K 4000K

Wattage: 10W (System 12W) | 12W (System 14W)

Beam: 40° | 60°

Ceiling cut-out Ø70mm / 6-25mm ceiling thickness



Smooth-FT88


Finish Options: White Black

CCT: 3000K 4000K

Wattage: 10W (System 12W) | 12W (System 14W)

Beam: 40° | 60°

Ceiling cut-out Ø88mm / 6-25mm ceiling thickness

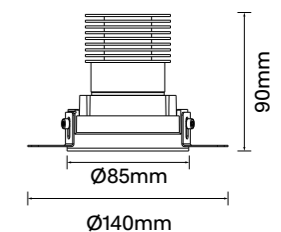



Spy-A Series

6W-25W Adjustable Recessed Downlight

Spy is a recessed luminaire that doubles as an adjustable spot thanks to a special feature that allows the luminaire to be pulled out and adjusted. The downlight turn spotlight provides symmetrical, low-glare light distribution in a minimal design. Die-cast aluminium constructed, it has a high-grade polycarbonate optical lens and is available in a range of applications finishes and colour temperatures to suit a range of applications.

Integrating Zhaga compliant Bridgelux LED technology with class leading LED driver technology, the Spy series comes with a 5 year warranty.

Standard



Optionals



Spy-A55

Finish Options: White Black


Baffle Colour: White Black Chrome

CCT: 3000K 4000K

Wattage: 6W (System 8W)

Beam: 21° | 27° | 37°

Ceiling cut-out Ø55mm / 6-25mm ceiling thickness

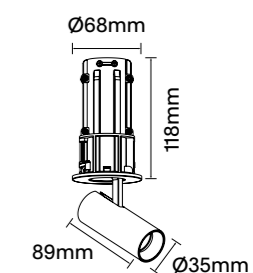

Spy-A90


Finish Options: White Black

CCT: 3000K 4000K

Wattage: 10W (System 12W)

Beam: 15° | 26° | 38° | 50°

Ceiling cut-out Ø90mm / 6-25mm ceiling thickness



Morq-A90 | 10W

Finish Options: White/Black Black


Baffle Colour: Black

CCT: 3000K 4000K

Wattage: 25W (System 28W)

Beam: 16° | 21° | 33° | 50°

Ceiling cut-out Ø140mm / 6-25mm ceiling thickness

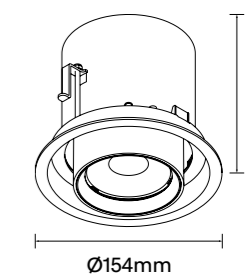


Tacca-F20

1W Fixed LED Recessed Downlight


LED ceiling recessed decorative luminaire providing symmetrical distribution. Quality constructed with a tiny, frosted glass tube protruding below the ceiling, Tacca-F20 is a unique alternative to traditional star point lighting and is well suited to dimly lit environments such as theatre rooms, hotel lobbies and bars.

Available in a range of colour temperatures and dimming options, Tube-F20 comes with a 24V / 48V working voltage installation, making installation fast and safe. Comes in various dimming options such as DALI-2 and Bluetooth and offers a 5 year warranty.

Standard



Optionals

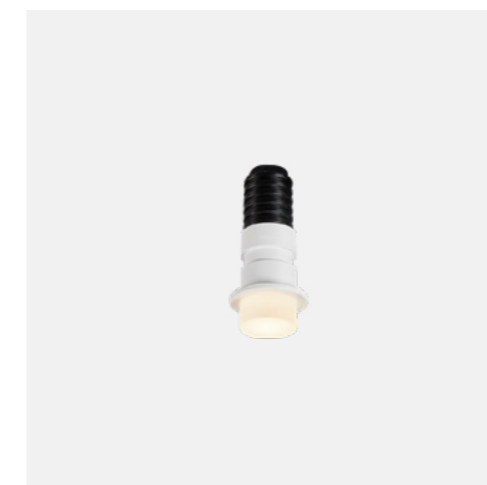

Tacca-F20

Finish Options: White


Glass Finish: Frosted

CCT: 3000K 4000K

Wattage: 1W

Beam: 50°

Ceiling cut-out Ø20mm / 6-25mm ceiling thickness



Twist Series

5W-40W Fixed LED Recessed Downlight

Twist Series is a modular fixed downlight series with an extensive range of cut-out sizes and wattages and a unique trim twist-lock design that enables versatility and functionality across a range of applications.

Suitable for new builds and ideal as a complete retro-fit downlight solution the Twist Series LED modules comes in 3 core sizes (small, medium and large) covering a wattage range of up to 40 Watts across the series. Each module has an IP44 rating as standard (IP54 module optional) and comprises interchangeable twist lock trims that adapt to a vast array of pre-existing ceiling cut outs.

The Twist Series, with its functional twist lock design is constructed of die-cast aluminium, a polycarbonate lens and integrates Osram CCT adjustable LED technology. The Twist Series luminaire series offers a 5 year warranty.

Standard

IP 44
3-Step
CRI (Ra) >85


Z
CE
MAINS DIM

WARRANTY 5YR

Optionals

Bluetooth
Osram

CCT Adjustable



Twist-S



Finish Options: White Black

CCT: 3000K 4000K 5000K

Wattage: 5W (System) | 9W (System)

Beam: 100°

Ceiling cut-out Ø75-85mm, Ø80-100mm
6-25mm ceiling thickness

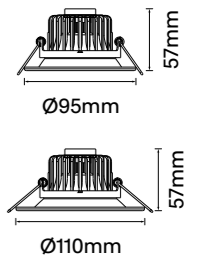

Recco-A125S

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 18W (System 21W) | 25W (System 28W)

Beam: Asymmetrical

Ceiling cut-out 122mm x 122mm 6-25mm ceiling thickness



Recco-A150S

Finish Options: White Black


Baffle Colour: White Black Matt

CCT: 3000K 4000K

Wattage: 25W (System 28W) | 38W (System 42W)

Beam: Asymmetrical

Ceiling cut-out 147mm x 147mm 6-25mm ceiling thickness

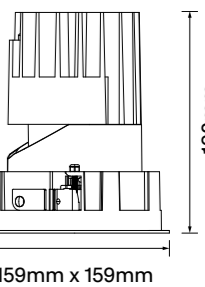



Versa-A83

7W / 9W Adjustable LED Recessed Downlight

Versa-A83 is a neat and compact adjustable LED luminaire providing low glare light distribution, different beam options and a smart retractable trim. With a small recessing depth, it is suitable for a variety of applications including shallow ceiling voids, while in deeper cavity ceilings Versa's smart retractable trim allows further recessing of the luminaire to reduce glare.

The downlight is made of high quality materials including a die-cast aluminium housing with a high purity primary reflector. It's simple and efficient design allows for ease of maintenance, adaptability and efficient supply.

Purpose built for the needs of various residential and soft commercial applications, it features Citizen COB LED technology, a CRI>90 and a mains-dimmable LED driver with optional DALI-2 and Bluetooth dimming options. The Versa-A83 Series also comes with a 5 year warranty.

Standard



Optionals



Versa-A83


Finish Options: White Black

CCT: 3000K 4000K

Wattage: 7W (System 9W) | 9W (System 10W)

Beam: 25° | 38° | 60°

Ceiling cut-out Ø83mm / 6-25mm ceiling thickness



Vibes-A72

7.5W / 9W / 11W / 13W Adjustable LED Recessed Modular Downlight

LED ceiling recessed adjustable luminaire series providing a high level of design flexibility through a range of modular components. Using interchangeable trims, rings, reflectors, modules, colours and optics and an optional IP20 or IP44 rating, the Vibes-A72 LED downlight series easily adapts to suit a wide range of applications.

Available in a range of colour temperatures, wattage / lumen packages and beam options, it is made from a die-cast aluminium body with high purity optics and baffle options. Using Citizen COB LED technology, the product is Mainsdimmable as standard with DALI-2 and Bluetooth wireless dimming options. The Vibes-A72 Series offers a 5 year warranty.




Standard



Optionals



Frame Options

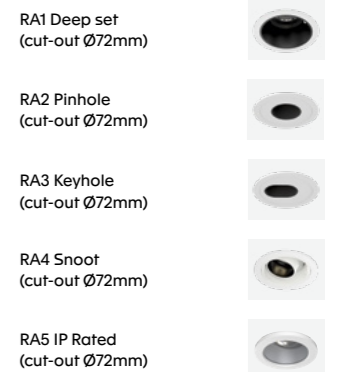

Vibes-A72

Finish Options: White Black


Baffle Colour: White Black Matt Gold

CCT: 3000K 4000K

Wattage: 7.5W (Ststem 9W) | 9W (Ststem 11W) | 11W (Ststem 13W) | 13W (Ststem 15W)

Beam: 15° | 20° | 25° | 35° | 60°

Ceiling cut-out Ø72mm / 6-25mm ceiling thickness

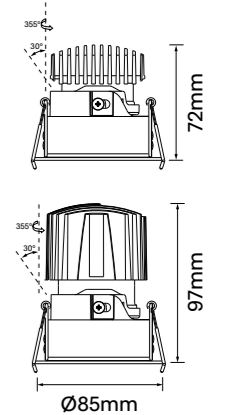

Void-F Series

5W-28W Fixed LED Recessed Downlight

Recessed architectural luminaire providing symmetrical, low-glare lighting distribution. The Void LED downlight series offers performance and efficiency within a slim fitting that's short enough to accommodate shallow ceiling voids. With an IP44 rating and multiple surface finishes to suit various applications it is available in a range of colour temperatures and wattage/ lumen packages.

Various dimming options include DALI or BLE (Casambi) on request and is quality constructed with a micro-prismatic, low UGR diffuser and a Bridgelux SMD LED. The Void-F Series comes with a 5 year warranty.

Standard

IP 44
UGR <19
3-Step

COI ON REQUEST
CRI (Ra) >90

CE
WARRANTY 5YR

Optionals

Bluetooth
DALI



Void-F75

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver Custom

CCT: 3000K 4000K

Wattage: 5W (System 6W)

Beam: 90°

Ceiling cut-out Ø75mm / 6-25mm ceiling thickness



Void-F145

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver Custom

CCT: 3000K 4000K

Wattage: 20W (System 22W)

Beam: 90°

Ceiling cut-out Ø145mm / 6-25mm ceiling thickness

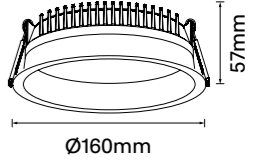

Void-F90

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver Custom

CCT: 3000K 4000K

Wattage: 10W (System 12W)

Beam: 90°

Ceiling cut-out Ø90mm / 6-25mm ceiling thickness



Void-F160

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver Custom

CCT: 3000K 4000K

Wattage: 25W (System 27W)

Beam: 90°

Ceiling cut-out Ø160mm / 6-25mm ceiling thickness

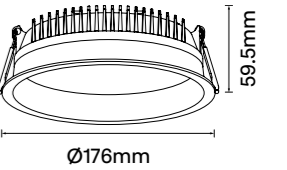

Void-F120

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver Custom

CCT: 3000K 4000K

Wattage: 15W (System 17W)

Beam: 90°

Ceiling cut-out Ø120mm / 6-25mm ceiling thickness



Void-F200

Finish Options: White Black


Baffle Colour: White Black Gold
 Silver Custom

CCT: 3000K 4000K

Wattage: 28W (System 30W)

Beam: 90°

Ceiling cut-out Ø200mm / 6-25mm ceiling thickness

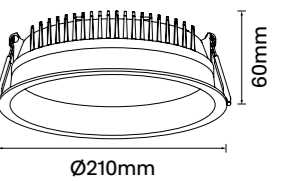



Indoor
Surface Mount Downlights




Axes-SM Series

10W-20W Adjustable Surface Mount Downlight

The Axes surface mounted adjustable luminaire provides optimised and efficient performance in a small discrete housing. The architectural LED fitting uses a deep-set light source and honeycomb louvre to provide a symmetrical distribution without glare. The fitting can be rotated 355° with the ability to tilt up to 30° for better focusing.

Built using a high quality aluminium construction and optical grade lens for controlled illumination. Available in a Matte White or Black exterior with a Black Baffle. Suitable for residential, hotel, retail and commercial applications. Integrating Bridgelux COB LED technology with high CRI for superior colour rendering, optional DALI-2 or BLE dimming on request. The Axes-SM offers a 5 year warranty.

Standard

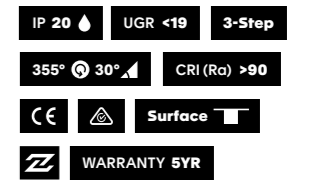

Optionals



Axes-SM80


Finish Options: White Black

Baffle Colour: Black

CCT: 2700K 3000K 4000K

Wattage: 10W (System 10.6W)

Beam: 15° | 25° | 38° | 50°



Axes-SM115


Finish Options: White Black


Baffle Colour: Black

CCT: 2700K 3000K 4000K

Wattage: 20W (System 20.5W)

Beam: 15° | 25° | 38° | 50°

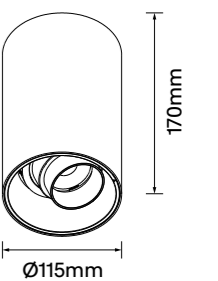

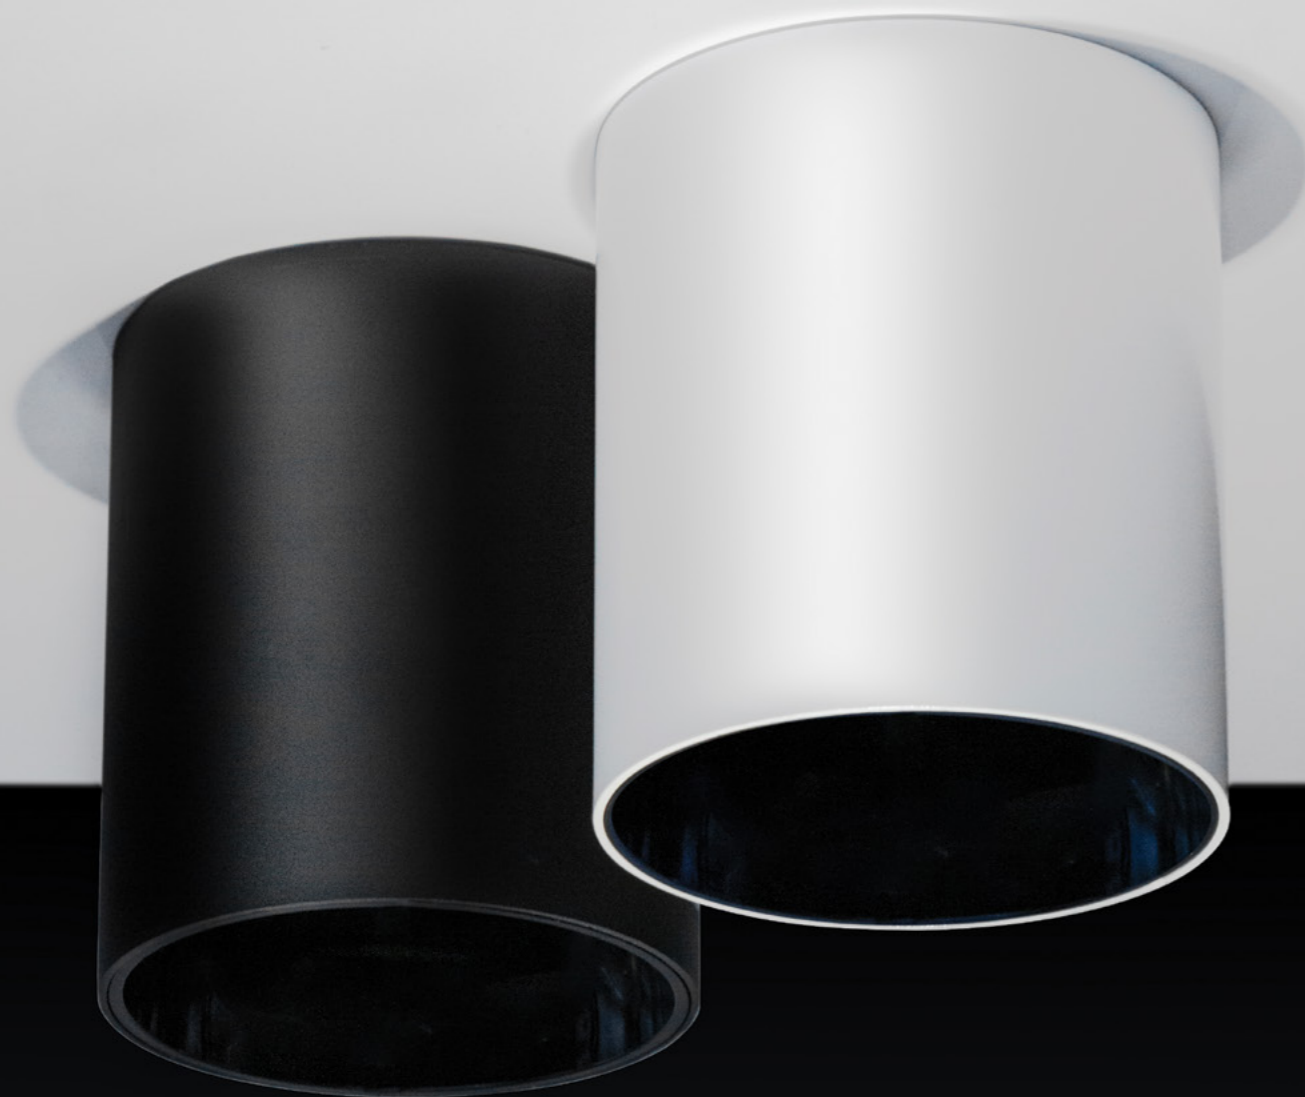

Index-SM Series

10W-36W Fixed IP Rated Surface / Suspended Mount Downlight

Surface mounted architectural luminaire providing optimised and symmetrical performance with a IP65 rating. Index comes with a wide selection of deep-set baffle options providing visual interest and low-glare illumination. Suspension options are also available.

Quality aluminium construction and incorporating premium components such as Citizen LED technology and Tridonic LED driver. The Index-SM Series is covered by a 5 year warranty.

Standard

IP 65 UGR <19 3-Step

CRI (Ra) >90 Suspended

CE Surface

WARRANTY 5YR

Optionals

Bluetooth



Index-SM115


Finish Options: White Black

Baffle Colour: White Black Gold
 Bronze Specular

CCT: 3000K 4000K

Wattage: 10W (12W System) | 15W (17W System)
 20W (22W System)

Beam: 20° | 40°



Index-SM140


Finish Options: White Black

Baffle Colour: White Black Gold
 Bronze Specular

CCT: 3000K 4000K

Wattage: 10W (System 11.3W) | 15W (System 16.7W)
 20W (System 23W) | 25W (System 27W)
 32W (System 36W) | 36W (System 40W)

Beam: 20° | 40°

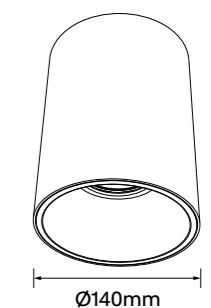



Kuppel-SM150

18W / 25W Fixed Surface / Suspended Mount Downlight

Surface mount LED architectural luminaire series providing optimised and efficient performance with an IP54 rating and deep-set lamp source for symmetrical low glare distribution. Available in a range of dimming options with either surface or suspension mounting.

With a die-cast aluminium housing and aluminium reflector it is available in standard and customisable finishes. Integrating Zhaga compliant Citizen LED technology, the Kuppel-SM150 comes with a 5 year warranty.

Standard



Optionals



Kuppel-SM150


Finish Options: White Black Custom

Baffle Colour: White Black Matt
 Custom

CCT: 3000K 4000K

Wattage: 18W (System 21W) | 25W (System 28W)

Beam: 30° | 60°

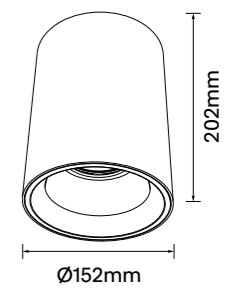

Linie-SM Series

4W-30W Fixed Surface Mount Linear Downlight

Fixed, surface mounted, LED architectural downlight series provides symmetrical, low-glare light distribution within a compact, linear housing. Available in a variety of baffle finishes to suit different applications and interior spaces.

Comes quality constructed using a die-cast aluminium structure with high grade polycarbonate secondary baffle optics. Integrating Bridgelux LED technology with a quality branded control gear, the Linie-SM Series comes with a 5 year warranty.

Standard


IP 20
UGR <19
CRI (Ra) >90

3-Step
RoHS
CE
Energy Star

Surface
WARRANTY 5YR

Optionals

Bluetooth
Philips

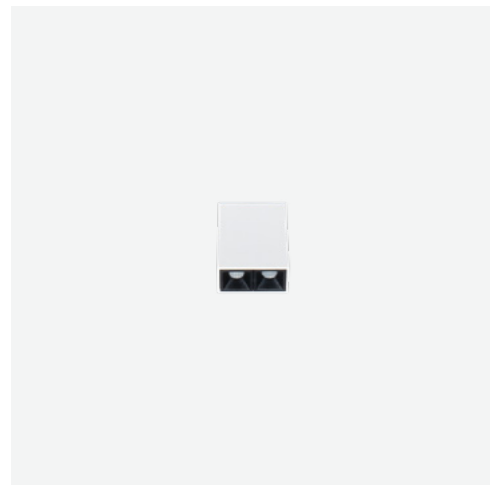

Linie-SM2C


Finish Options: White Black

Baffle Colour: White Black Specular
 Gold Rose Gold

CCT: 2700K 3000K 4000K

Wattage: 4W (System 6W)

Beam: 15° | 30° | 45°



Linie-SM10C


Finish Options: White Black

Baffle Colour: White Black Specular
 Gold Rose Gold

CCT: 2700K 3000K 4000K

Wattage: 20W (System 23W)

Beam: 15° | 30° | 45°

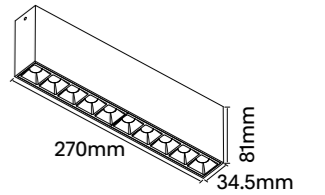

Linie-SM5C



Finish Options: White Black

Baffle Colour: White Black Specular
 Gold Rose Gold

CCT: 2700K 3000K 4000K

Wattage: 10W (System 12W)

Beam: 15° | 30° | 45°

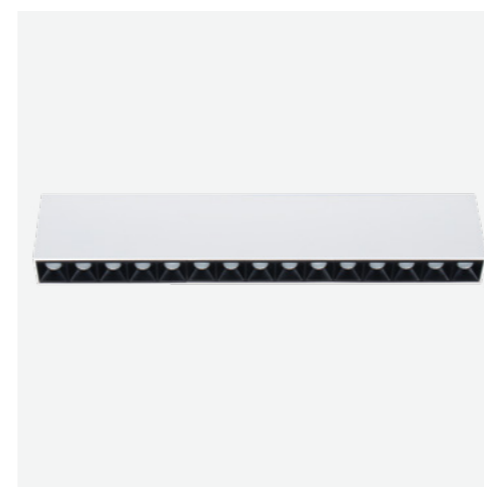

Linie-SM15C


Finish Options: White Black

Baffle Colour: White Black Specular
 Gold Rose Gold

CCT: 2700K 3000K 4000K

Wattage: 30W (System 32W)

Beam: 15° | 30° | 45°

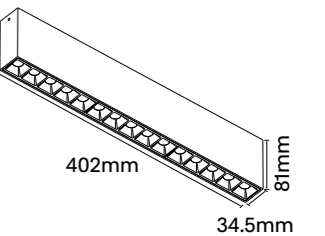




Meko-SM Series

13W-32W Fixed Surface / Suspended Mount Downlight

Surface mounted LED architectural luminaire providing optimised and efficient performance. Features a deep-set light source, symmetrical distribution and IP44 rating. A small, discrete and minimal fitting that's big on performance, it comes surface mounted as standard with an optional wire or rod suspension to suit a range of applications. Features a die-cast aluminium baffle with an aluminium outer body.

Available in a standard matt white or black body with a white, black or gold finished baffle. Custom colours are also available on request. Integrating CREE COB LED technology, a non-dimmable driver as standard with optional DALI-2 or BLE (Bluetooth) dimming, the Meko-SM Series comes with a 5 year warranty.

Standard



Optionals



Meko-SM65 | 13W


Finish Options: White Black Custom

Baffle Colour: White Black Gold

CCT: 3000K 4000K

Wattage: 13W

Beam: 25° | 40° | 60°



Meko-SM80 | 23W


Finish Options: White Black Custom

Baffle Colour: White Black Gold

CCT: 3000K 4000K

Wattage: 23W

Beam: 15° | 25° | 40°



Meko-SM95 | 32W


Finish Options: White Black Custom

Baffle Colour: White Black Gold

CCT: 3000K 4000K

Wattage: 32W

Beam: 15° | 25° | 40°





Momo-SM Series

9W-28W Fixed Surface / Suspended Mounted Downlight

LED surface mounted architectural luminaire series providing symmetrical, low-glare light distribution for a wide range of applications. Featuring a high quality construction, minimal design and unique optical lens the Momo LED surface mounted series offers optimised and efficient performance.

Comes in a white or black surface finish and a range of baffle options to suit different residential and commercial spaces. Featuring a Zhaga compliant COB LED, a wide range of colour temperatures and dimming options from DALI-2 through to Bluetooth, the Momo-SM Series comes with a 5 year warranty.

Standard



Optionals



Momo-SM75


Finish Options: White Black Custom

Baffle Colour: White Black Specular

CCT: 3000K 4000K

Wattage: 9W (System 10W)

Beam: 15° | 24° | 38° | 50°



Momo-SM90


Finish Options: White Black Custom

Baffle Colour: White Black Specular

CCT: 3000K 4000K

Wattage: 18W (System 20W)

Beam: 15° | 24° | 38° | 50°



Momo-SM128


Finish Options: White Black Custom

Baffle Colour: White Black Specular

CCT: 3000K 4000K

Wattage: 28W (System 31W)

Beam: 15° | 24° | 38° | 50°

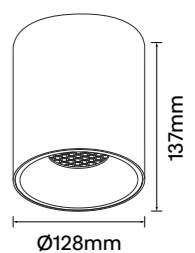



Muse-SM Series

4W-7W Fixed Micro Surface Mounted Downlight


Micro surface mounted LED architectural luminaire providing optimised and efficient performance. Featuring set-back optics and a symmetrical distribution, Muse's minimal design is highlighted by its miniature size which incorporates a dimmable circuit as standard.

Die-cast constructed with a quality painted surface treatment, the Muse comes in a matt black or matt white exterior and black baffle. Custom colours are also available on request and includes a 3 year warranty.

Standard



Optionals

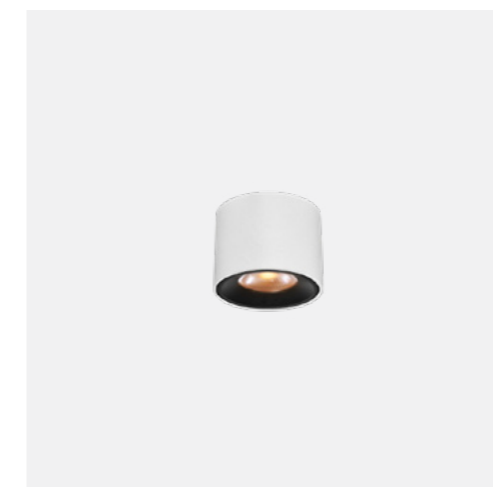

Muse-SM45



Finish Options: White Black

Baffle Colour: Black Custom

CCT: 3000K 4000K

Wattage: 4W (System 28W)

Beam: 30°

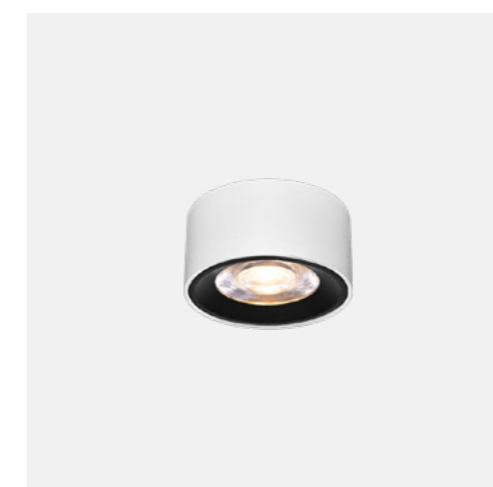

Muse-SM65


Finish Options: White Black

Baffle Colour: Black Custom

CCT: 3000K 4000K

Wattage: 7W (System 28W)

Beam: 30°



Peeper-SM Series

8W-30W Fixed Surface Mounted Downlight

LED, surface mounted architectural luminaire series providing symmetrical, low-glare light distribution in a high quality manufactured fitting.

The Peeper LED surface mounted series offers efficient performance with a minimal designed body and a symmetrical distribution to suit a wide range of applications thanks to its unique optical lens. Offered in white or black colour options to suit applications ranging from residential to commercial fitouts and utilises a DOB LED.

A wide range of colour temperatures and dimming options from Mains dimmable through to DALI-2 and Bluetooth. Peeper-SM Series offers a 5 year warranty.

Standard

IP 54 UGR <19 3-Step


CRI (Ra) >90 Surface

MAINS DIM CE

WARRANTY 5YR

Optionals

Bluetooth DALI

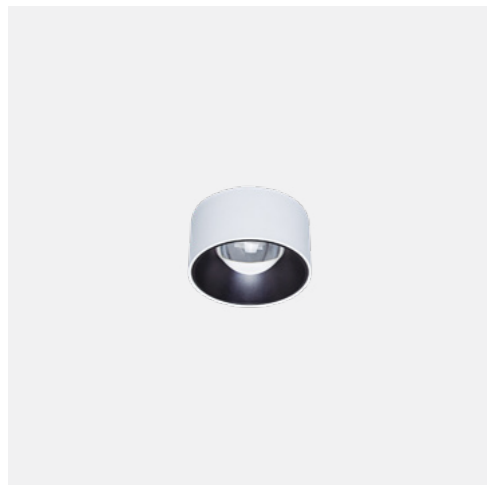

Peeper-SM65



Finish Options: White Black

Baffle Colour: White Black

CCT: 3000K 4000K

Wattage: 8W

Beam: 45°

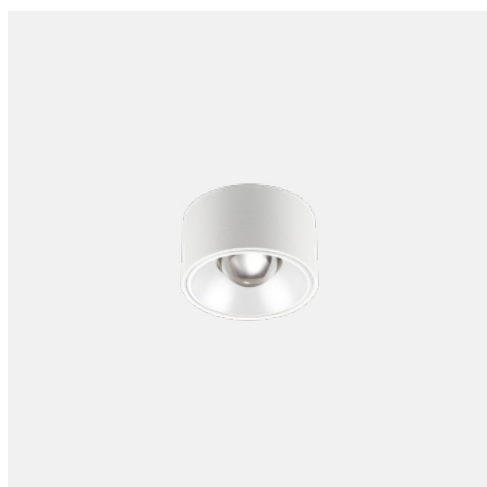

Peeper-SM80



Finish Options: White Black

Baffle Colour: White Black

CCT: 3000K 4000K

Wattage: 15W

Beam: 35°

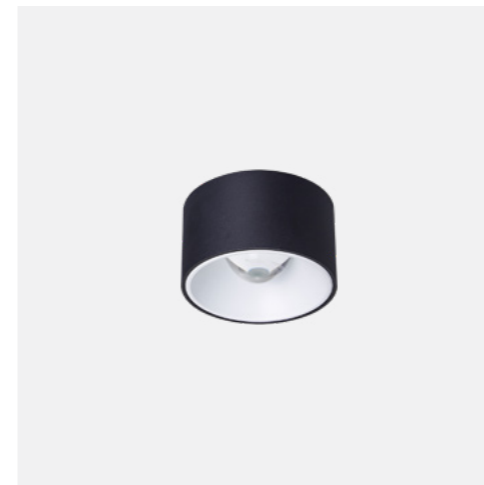

Peeper-SM95



Finish Options: White Black

Baffle Colour: White Black

CCT: 3000K 4000K

Wattage: 20W

Beam: 45°

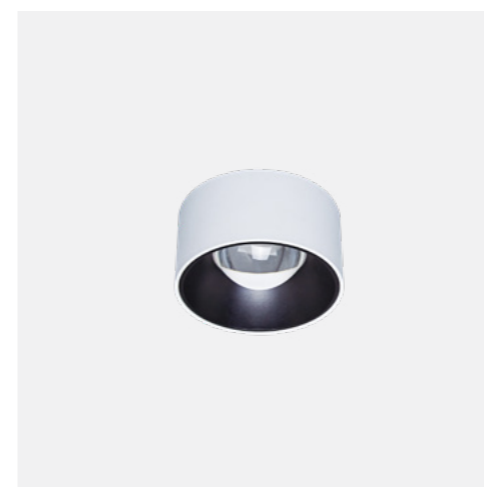

Peeper-SM120


Finish Options: White Black

Baffle Colour: White Black

CCT: 3000K 4000K

Wattage: 30W

Beam: 50°





Warp-SM Series

7W-15W Adjustable Surface Mount Downlight


Surface mounted adjustable LED architectural luminaire that can be rotated 355° and tilted up to 90° to provide flexibility and versatility in a range of applications. With a deep-set light source and symmetrical distribution the Warp is small, discrete and minimal by design.

With a die-cast aluminium construction it is available in standard matte white and solid black surface finishes with a black internal baffle. The Warp-SM Series integrates Citizen COB LED technology and a non-dimmable driver as standard with optional DALI-2 or Bluetooth dimming. The Warp-SM Series offers a 5 year warranty.

Standard



Optionals

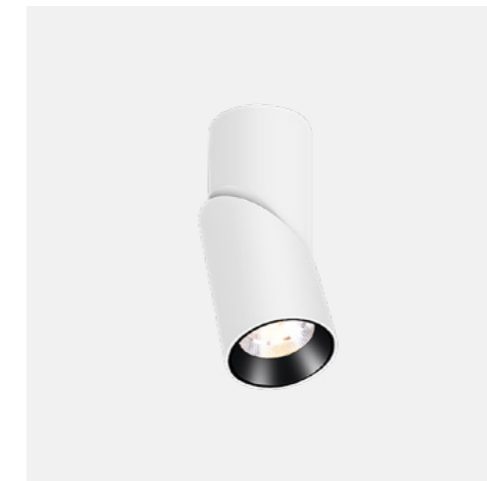

Momo-SM75



Finish Options: White Black Custom

Baffle Colour: White Black Specular

CCT: 3000K 4000K

Wattage: 9W (System 10W)

Beam: 15° | 24° | 38° | 50°

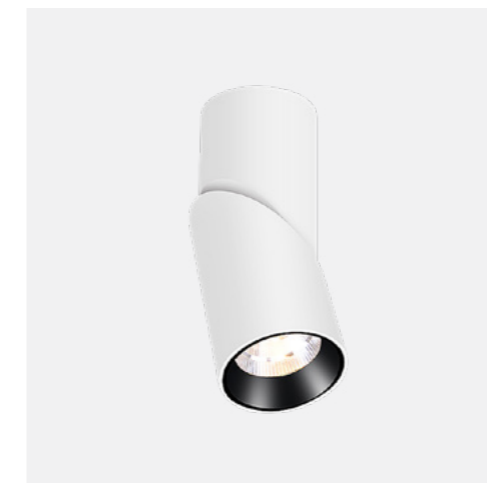

Momo-SM90


Finish Options: White Black Custom

Baffle Colour: White Black Specular

CCT: 3000K 4000K

Wattage: 18W (System 20W)

Beam: 15° | 24° | 38° | 50°



Momo-SM128


Finish Options: White Black Custom


Baffle Colour: White Black Specular

CCT: 3000K 4000K

Wattage: 28W (System 31W)

Beam: 15° | 24° | 38° | 50°





CoLab Lighting

Tel: +61 2 9150 0999

info@colab.lighting

29-31 Richland Street,
Kingsgrove Sydney, NSW,
Australia, 2208

ABN 50 169 440 224