

## Recco-F150

### 25W / 38W Fixed LED Round Recessed Downlight




Luminaire Finishes

- White (WH)     Black (BK)

Interchangeable Baffle Finishes

- White (WH)     Black (BK)     Matt (MT)  
 Specular (SP)     Black Chrome (BC)  
 Gold (GD)

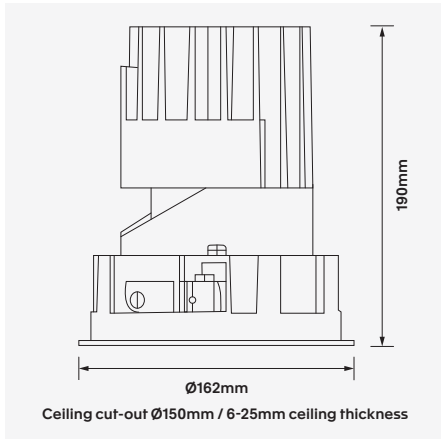

Accessories

**RECCO-150-HC**  
Honeycomb mesh



**RECCO-150-TR**  
Trimless



WATTAGE 25W / 38W	COI ON REQUEST	Bluetooth	Z	CE	WARRANTY 5YR
3-Step	Ø 150	28° / 32° / 50°	CRI (Ra) >90	IP 20	UGR <19

A fixed recessed LED architectural luminaire series providing low-glare light distribution. High quality and versatile, the Recco fixed LED downlight series offers optimised and efficient performance in a vast range of cut-out and wattage/lumen packages. Recco is available in a range of colour temperatures, beam angles, secondary reflector finishes and dimming options. Additional accessories can also be used with the recessed downlight, including an anti-glare honeycomb reflector and trimless mounting kit.

Recco fixed is constructed from a die-cast aluminium housing with high purity aluminium primary reflector and high-grade polycarbonate secondary reflector. A spring-loaded push back arm also makes for easy installation.

The Recco series Integrates Zhaga compliant Citizen LED technology with Tridonic control gear and comes with a 5 year warranty.

- Luminaire wattage: 25W, 38W (System 28W, 42W)
- Luminous flux: 1900-2000Lm, 2700-2900Lm<sup>2</sup>
- Luminaire efficacy: 76Lm/W, 71.05Lm/W<sup>1</sup>
- Correlated colour temperature: 3000K, 4000K
- Colour rendering index: >90 standard; >97/COI on request<sup>3</sup>
- Mac-Adams Ellipse: 3-SDCM
- LED brand: Citizen COB LED
- Glare control: UGR<19
- Symmetrical distribution: 28°, 32°, 50°
- Outer trim Ø162mm; Ceiling cut-out Ø150mm
- Ingress protection rating: IP20
- Luminaire finishes: White, Black
- Baffle Options: White, Black, Matt, Specular, Black Chrome, Gold<sup>4</sup>
- Longevity: >50,000Hrs L80 B10
- Driver: Tridonic non-dimmable as standard
- Dimming: DALI-2, BLE (basicDIM Wireless / Casambi) on request<sup>4</sup>
- Weight: 1.75Kg (excluding driver)
- Warranty: 5 years<sup>5</sup>

Model	LED Output <sup>2</sup>	Luminous Flux <sup>2</sup>	LED Wattage	System Wattage	CCT	CRI <sup>3</sup>	Distribution
RECCO-F150-25W-3K	2700Lm	1900Lm	25W	28W	3000K	>90	28°, 32°, 50°
RECCO-F150-25W-4K	2800Lm	2000Lm	25W	28W	4000K	>90	28°, 32°, 50°
RECCO-F150-38W-3K	3700Lm	2700Lm	38W	42W	3000K	>90	28°, 32°, 50°
RECCO-F150-38W-4K	3900Lm	2900Lm	38W	42W	4000K	>90	28°, 32°, 50°


For Non-dimming add suffix ND  
 For DALI-2 dimming add suffix D  
 For BLUETOOTH dimming add suffix BT

Example product order code configuration: RECCO-F150-25W-3K-50-D-(WH/SP)

Model	Wattage	CCT	Distribution	Driver	Luminaire Finish / Baffle Finish					
RECCO-F150	+	25W	+	3K	+	50	+	D	+	WH/SP


Light Distribution

RECCO-F150-38W-3K-50

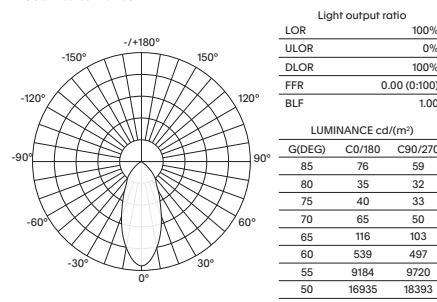

Room Reflectance	Room Index									
Ceiling   Walls   Floor	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
70   50   20	81	87	93	97	101	103	105	108	109	

Cone Diagram

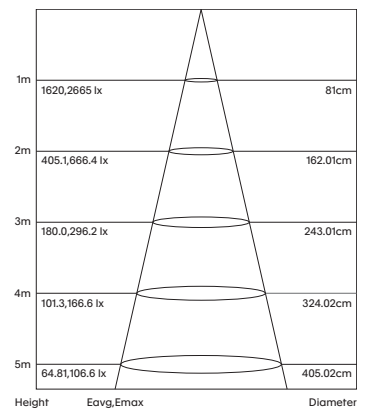

1 Luminaire efficacy based on CCT 3000K; CCT variation will alter efficacy  
 2 +/- 10% stated initial LED and luminous flux tolerance  
 3 Colour Rendering Index: >90 Standard (Citizen COB Series), >97/Cyanosis Observation Index (COI) compliance on request: Citizen LED series compliant to AS/NZS1680.2.5:2018; COI <3.3 and CCT 3300-5300K  
 4 Additional charges apply for non-standard colour/s and dimming options  
 5 Five year manufacturer's warranty covering product defects and performance deficiencies