


DUSK-BL65

5W Adjustable CCT Garden Landscape Luminaire



Luminaire Finish

Black (BK)

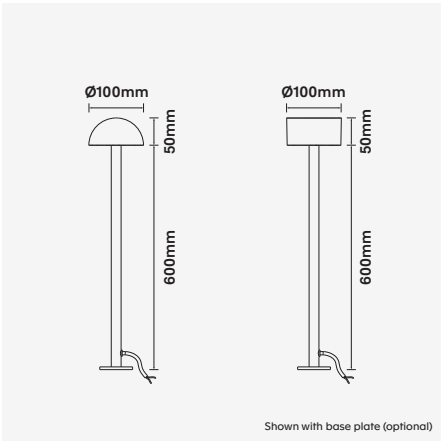

2200K/3000K Selectable



Accessories

DUSK-BL65-BASE

Surface mount base only
Ø60mm x Height 5mm
Black surface finish



DUSK-BL65-300MM-EXT

300mm extension post only
Ø18mm x Length 300mm
Black surface finish



DUSK-BL65-CAP-A

Dome cap only
Ø100 x Height 50mm
Black surface finish



DUSK-BL65-CAP-B

Squared cap only
Ø100 x Height 50mm
Black surface finish



Project:
Type:
Model:

WATTAGE 5W

Surface

3-Step

CRI (Ra) >80

130°

IP 66

CE

WARRANTY 5YR

VOLTAGE 24VDC

CCT Switchable

Dusk, the IP66 rated modular designed outdoor pathway light with its' advanced lens technology offers 130° light distribution. The twist and lock dome or cylindrical interchangeable covers and push button selectable CCT options of 2200K or 3000K will appeal to Residential, commercial or public space applications.

The triple layered coating is suitable for seaside installations for high corrosion resistance against salt mist. Invisible screws, extension poles for the right height and a choice of spike or surface mounting installation accessories. Extra Low-voltage 24VDC working voltage for additional safety. Dusk with minimalist appearance, perfect to blend into its' environment. Dusk series offers a 5-year warranty.

- Luminaire wattage: 4W (System 5W)
- Luminous flux: 260-390Lm²
- Luminaire efficacy: 78Lm/W¹
- Correlated colour temperature: 2200K~3000K selectable
- Colour rendering index: >80 standard
- Mac-Adams Ellipse: 3-SDCM
- LED brand: Osram SMD LED
- Symmetrical distribution: 130°
- Outer trim Ø100mm x Height 650mm
- Mounting: PC Garden spike (standard), Base plate (optional)
- Ingress protection rating: IP66 standard
- Luminaire finish: Black
- Longevity: >50,000Hrs L80 B10
- Working voltage: 24VDC
- Driver: Requires Remote 24VDC LED driver
- Weight: 450g (excluding driver)
- Warranty: 5 years⁴


Model	LED Output ²	Luminous Flux ²	LED Wattage	System Wattage	CCT	CRI ³	Distribution
DUSK-BL65-X-5W-CCT	350Lm	260Lm	4W	5W	2200K	>80	130°
	510Lm	390Lm	4W	5W	3000K	>80	130°

For Non-dimming add suffix ND
Please replace X for:
A = DUSK-BL65-CAP-A Domed cap
B = DUSK-BL65-CAP-B Squared cap


Example product order code configuration: DUSK-BL65-A-5W-CCT-ND-(BK)

Model	Cap Type		Wattage		CCT		Distribution		Driver		Luminaire Finish	
DUSK-BL65	+	A	+	5W	+	CCT	+	130	+	ND	+	BK

Light Distribution

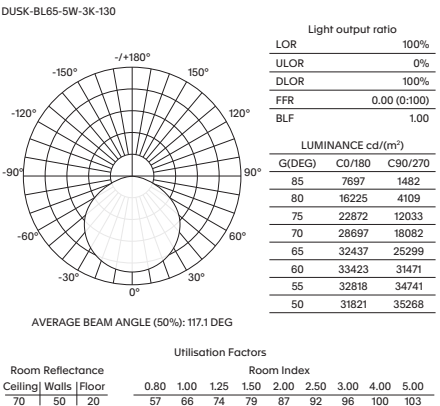

Cone Diagram

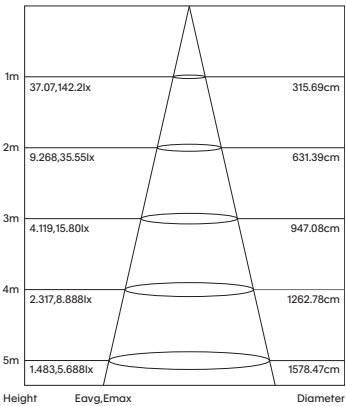

1 Luminaire efficacy based on CCT 3000K; CCT variation will alter efficacy
2 +/- 10% stated initial LED and luminous flux tolerance
3 Colour Rendering Index: >80 Standard (Osram SMD LED)
4 Five year manufacturer's warranty covering product defects and performance deficiencies