


Deltaflex-Mini-TW

15W CCT Tunable Flexible Mini LED Strip Lighting

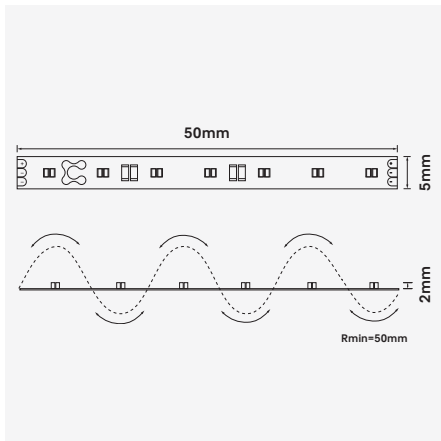

Example profile options⁴

CHOPSTIX-0812-SM
W 8mm x H 12mm x Length Custom



CHOPSTIX-1212-REC
W 12mm x H 12mm x Length Custom



GRAZE-2109-REC
W 21mm x H 9mm x Length Custom



GRAZE-1010-SM
W 10mm x H 10mm x Length Custom



WATTAGE 15W
SINGLE BIN
3-Step
Bluetooth
WARRANTY 5YR

CRI (Ra) >90
VOLTAGE 24VDC
120°
IP 20
DMX / RDM

The Deltaflex-Mini-TW series is a tunable white mini LED strip. Used to create a more pleasant and comfortable space or conducive working environment the Deltaflex-Mini-TW can be used in a variety of applications including pelmets, coffers and linear profiles. The Deltaflex-Mini-TW is an efficient and versatile 24V flexible LED lighting system with a multitude of colour mixing options from 2700K through to 6000K.

Optional controls from DALI-2 dimming, Bluetooth dimming and DMX available on request. The Deltaflex-Mini-TW series offers a 5 year warranty.

- Luminaire wattage/m: 15W
- Luminous flux/m: 1318.4Lm/m; 2700K: 549Lm/m; 6000K: 622Lm/m²
- Luminaire efficacy: 2700K: 73.2Lm/W; 6000K: 82.9Lm/W¹
- Correlated colour temperature: 2700K ~ 6000K
- Colour rendering index: >90³
- Single Bin CCT selection
- LED Source / Quantity: SMD2110; 280pcs/m
- Symmetrical distribution: 120°
- Minimum Cutable Section: 50mm (group of 14 x SMD LED)
- Ingress protection rating: IP20
- Longevity: >50,000Hrs L80
- Driver: Requires constant voltage 24VDC non dimmable LED driver as standard⁴
- Dimming: Remote DALI DT6, BLE (basicDIM Wireless / Casambi) & DMX-512 on request⁴
- Warranty: 5 years⁵


Model	Luminous Flux/m ²	LED Wattage/m	CCT	CRI ³	Distribution	Number of LED/m	Max. Continuous Length/m
DELTAFLX-MINI-15W-TW	549Lm	7.5W	2700K	>90	120°	140	5m
	622Lm	7.5W	6000K	>90	120°	140	5m

For DALI DT6 dimming add suffix D
For BLUETOOTH dimming add suffix BT
For DMX control, add suffix DMX


Example product order code configuration: DELTAFLX-MINI-15W-TW-D

Model	Wattage	CCT	Driver
DELTAFLX-MINI	15W	TW	D

Light Distribution

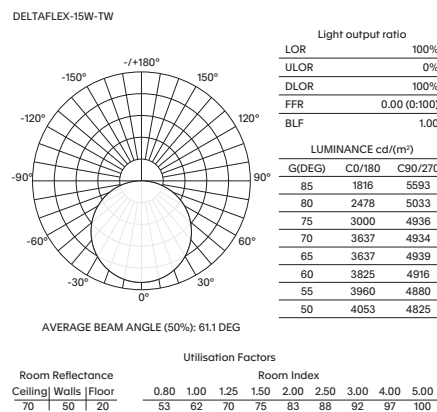

Cone Diagram

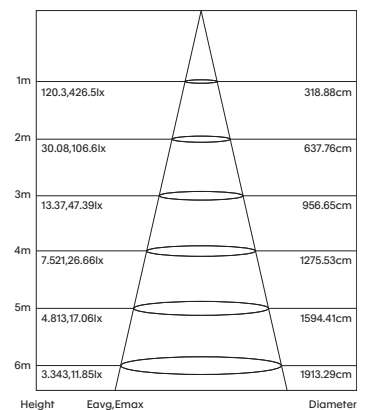

1 Luminaire efficacy based on CCT 2700K and CCT 6000K
2 +/- 10° stated initial LED and Luminous Flux tolerance
3 Colour Rendering Index: >90 Standard
4 LED mounting profiles, LED drivers, DALI dimming, BLE (basicDIM Wireless/Casambi) and DMX will incur additional charges
5 Five year manufacturer's warranty covering product defects and performance deficiencies.