


## Versa-A83

### 7W / 9W Adjustable LED Recessed Downlight



Luminaire Finishes

- White (WH)     Black (BK)

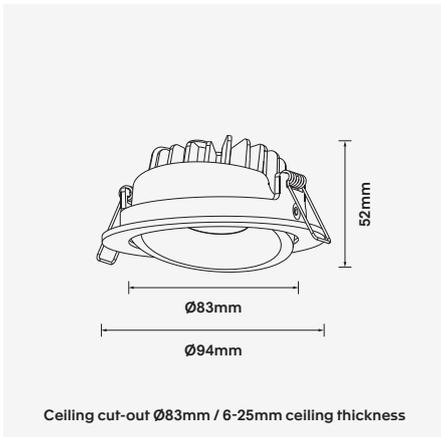

Ceiling cut-out Ø83mm / 6-25mm ceiling thickness



0-14mm ↑↓

WATTAGE 7W / 9W
Ø 83
IP 44
Bluetooth
Z
bati
CE
WARRANTY 5YR

3-Step
CRI (Ra) >90
25° / 38° / 60°
25°
0-14mm ↑↓
MAINS DIM

Versa is a neat and compact adjustable LED luminaire providing low glare light distribution, different beam options and a smart retractable trim. With a small recessing depth, it is suitable for a variety of applications including shallow ceiling voids, while in deeper cavity ceilings Versa's smart retractable trim allows further recessing of the luminaire to reduce glare.

The downlight is made of high quality materials including a die-cast aluminium housing with a high purity primary reflector. It's simple and efficient design allows for ease of maintenance, adaptability and efficient supply.

Purpose built for the needs of various residential and soft commercial applications, it features Citizen COB LED technology, a CRI>90 and a mains-dimmable LED driver with optional DALI-2 and Bluetooth dimming options. The Versa-A83 luminaire series also comes with a 5 year warranty.

- Luminaire wattage: 7W, 9W (System 9W, 10W)
- Luminous flux: 678-692Lm, 872-906Lm<sup>2</sup>
- Luminaire efficacy: 75.33Lm/W, 87.2Lm/W<sup>1</sup>
- Correlated colour temperature: 3000K, 4000K
- Colour rendering index: >90<sup>3</sup>
- Mac-Adams Ellipse: 3-SDCM
- LED Brand: Citizen COB LED
- Symmetrical distribution: 25°, 38°, 60°
- Outer trim Ø94mm, Ceiling cut-out Ø83mm
- Adjustability: +/- 25°, 0-14mm Adjustment
- Ingress protection rating: IP44
- Luminaire finishes: White, Black
- Longevity: >50,000Hrs L80 B10
- Driver: Mains-dimmable LED driver as standard
- Dimming: DALI-2, BLE (basicDIM Wireless / Casambi) on request<sup>4</sup>
- Weight: 200g (Excluding driver)
- Warranty: 5 years<sup>5</sup>

Model	LED Output <sup>2</sup>	Luminous Flux <sup>2</sup>	LED Wattage	System Wattage	CCT	CRI <sup>3</sup>	Distribution
VERSA-A83-7W-3K	943Lm	678Lm	7W	9W	3000K	>90	25°, 38°, 60°
VERSA-A83-7W-4K	957Lm	692Lm	7W	9W	4000K	>90	25°, 38°, 60°
VERSA-A83-9W-3K	1359Lm	872Lm	9W	10W	3000K	>90	25°, 38°, 60°
VERSA-A83-9W-4K	1395Lm	906Lm	9W	10W	4000K	>90	25°, 38°, 60°


For Mains dimming add suffix MD  
For DALI-2 dimming add suffix D  
For BLUETOOTH dimming add suffix BT

Example product order code configuration: VERSA-A83-7W-3K-60-D-(WH)

Model	Wattage	CCT	Distribution	Driver	Luminaire Finish					
VERSA-A83	+	7W	+	3K	+	60	+	D	+	WH

#### Light Distribution


VERSA-A83-9W-3K-60



AVERAGE BEAM ANGLE (50%): 56.9 DEG

Room Reflectance		Utilisation Factors									
Ceiling	Walls/Floor	Room Index									
0.8	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	6.00	7.00	8.00
70	50	20	67	73	78	81	85	87	90	92	94

#### Cone Diagram

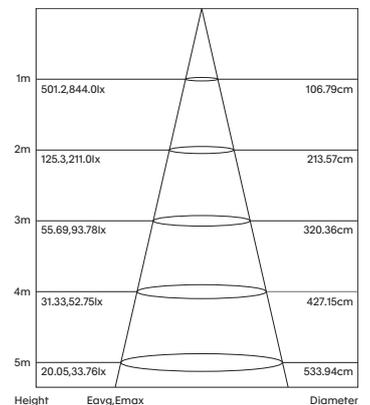

1 Luminaire efficacy based on CCT 3000K; CCT variations will alter efficacy  
2 +/- 10% stated initial LED and luminous flux tolerance  
3 Colour Rendering Index: >90 Standard (Citizen COB Series)  
4 Additional charges apply for non-standard colour/s and dimming options  
5 Five year manufacturer's warranty covering product defects and performance deficiencies