


Cleo-WL

10W / 34W Circular Wall Mounted Luminaire



Luminaire Finishes

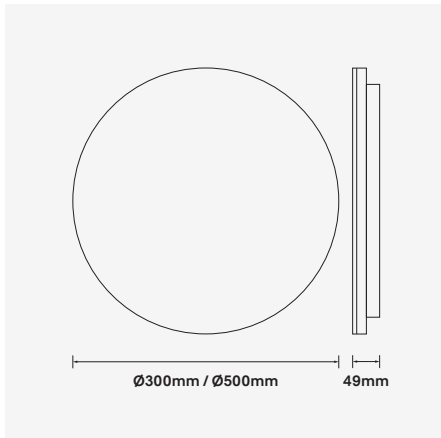

WATTAGE 10W / 34W **3-Step** **CRI (Ra) >90** **Bluetooth** **bati** **CE** **WARRANTY 5YR**
360° **IP 20** **Wall mount**

Circular wall mounted luminaire designed to provide indirect illumination of vertical surfaces and accent lighting for a range of interiors. Illumination radiates in a full 360° around the base of the fitting creating a soft warm glow.

Designed to complement a range of interior finishes and spaces, the Cleo is available in two sizes; a 300mm or 500mm diameter and five finishes; Oxide Black, Matt White, Satin Brushed brass, White marble, Black marble and custom finishes on request.

Incorporating non dimmable LED driver as standard with the optional ability for Bluetooth dimming or DALI dimming upon request, Cleo comes with a 5 year warranty.

- Luminaire wattage: 10W / 34W (System)
- Luminous flux: 545Lm / 1800Lm²
- Luminaire efficacy: 54.5Lm/W / 52.94Lm/W¹
- Correlated colour temperature: 2700K, 3000K, 4000K
- Colour rendering index: >90³
- Mac-Adams Ellipse: 3-SDCM
- LED type: Epistar SMD LED
- Symmetrical distribution: 360°
- Outer trim Ø300 x Depth 49mm; Ø500 x Depth 49mm
- Ingress protection rating: IP20
- Luminaire finishes: Matt White, Oxide Black, Satin Gold, White Marble, Black Marble; Custom optional⁴
- Longevity: >50,000Hrs L80 B20
- Driver: Non dimmable as standard
- Dimming: DALI-2, BLE (basicDIM Wireless / Casambi) on request⁴
- Weight: 5kgs Ø300mm, 10kgs Ø300 Marble, 13kgs Ø500mm, 20kgs Ø500 Marble (Including LED driver)
- Warranty: 5 years⁵

Model	Luminous Flux ²	System Wattage	CCT	CRI ³	Distribution
CLEO-WL300-10W-27K	490Lm	10W	2700K	>90	360°
CLEO-WL300-10W-3K	545Lm	10W	3000K	>90	360°
CLEO-WL300-10W-4K	578Lm	10W	4000K	>90	360°
CLEO-WL500-34W-27K	1620Lm	34W	2700K	>90	360°
CLEO-WL500-34W-3K	1800Lm	34W	3000K	>90	360°
CLEO-WL500-34W-4K	1895Lm	34W	4000K	>90	360°

For Non-dimming add suffix ND
For DALI-2 dimming add suffix D
For BLUETOOTH dimming add suffix BT

Example product order code configuration: CLEO-WL300-10W-3K-360-ND-(WM)

Model	Wattage	CCT	Distribution	Driver	Luminaire Finish					
CLEO-WL300	+	10W	+	3K	+	360	+	ND	+	WM

1 Luminaire efficacy based on 3000K; CCT variation will alter efficacy
 2 +/- 10% stated initial LED luminous flux tolerance
 3 Colour Rendering Index: >90 Standard
 4 Additional charges apply for non-standard colour/s and dimming options
 5 Five year manufacturer's warranty covering product defects and performance deficiencies