




Alma-WL320

11W Decorative Glass Pendant Mounted Luminaire

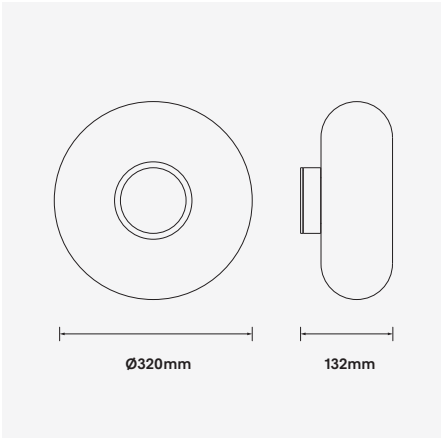

Glass Finishes

Smoke Grey (SG)

Centre and Base Finishes

Brushed Nickel (BN)

WATTAGE 11W

IP 20

3-Step

CRI (Ra) >90

MAINS DIM

CE

WARRANTY 5YR

Flicker Free

Wall mount

Ceiling mount

Alma wall luminaire with Czechia glass is a masterstroke of minimalist elegance, fusing old-world craftsmanship with cutting-edge modernity. Its brushed aluminium frame exudes sophistication, while the glass, handblown with unparalleled expertise - boasts an iridescent quality that subtly plays with light, giving any space a luminous, ethereal aura.

The integrated LED component is where form meets function. Emitting a warm yet contemporary glow, it redefines energy efficiency without compromising the art of illumination. This wall light is not just a fixture; it's a statement.

The juxtaposition of traditional glasswork and futuristic aluminium creates a dialogue between past and present, ensuring it resonates with both history aficionados and modern design enthusiasts.

- Luminaire wattage: 11W
- Luminous flux: 218Lm - 220Lm²
- Luminaire efficacy: 16.77Lm/W - 16.95Lm/W¹
- Correlated colour temperature: 2700K, 3000K (standard)
- Colour rendering index: >90³
- Mac-Adams Ellipse: 3-SDCM
- LED type: Epistar SMD LED
- Symmetrical distribution: 360°
- Outer trim Ø320mm x Depth 132mm
- Ingress protection rating: IP20
- Glass finish: Smoke Grey
- Metal ware finish: Brushed Nickel
- Longevity: >50,000Hrs L80 B20
- Input voltage: 220-240VAC, 50-60Hz
- Driver: Mains-Dimmable (Standard); DALI optional
- Weight: 1.8Kg
- Box dimensions & weight: 40 x 40 x 14cm. 3.2Kg
- Warranty: 5 years⁴

Model	Luminous Flux ²	LED Wattage	System Wattage	CCT	CRI ³	Distribution
ALMA-WL320-11W-27K	218Lm	11W	13W	2700K	>90	360°
ALMA-WL320-11W-3K	220Lm	11W	13W	3000K	>90	360°

For Mains-Dimming add suffix MD (standard)
For DALI-Dimming add suffix D

Example product order code configuration: ALLURE-WL320-13W-3K-360-MD-(AM/BB)

Model		Wattage		CCT		Distribution		Driver		Glass Finish / Center and Base Finish
ALMA-WL320	+	11W	+	3K	+	360	+	MD	+	SG/BN

1 Luminaire efficacy based on 3000K and smoked Grey glass; CCT variation will alter efficacy
2 +/- 10% stated initial LED luminous flux tolerance
3 Colour Rendering Index: >90 Standard
4 Five year manufacturer's warranty covering product defects and performance deficiencies